

**Catalog Number UPC Number** Description

01116 60198601116 Vinyl Insulated Fork Spade Terminal 22-18

## Features


- Color Coded insulation for easy identification
- Manufactured from high strength copper alloy
- Electro-tin plated for corrosion resistance
- Easy entry expanded insulation eliminates strand "Hang Up", increases the crimping rates and the reliability of the termination
- Wire range stamped on the surface for easy interpretation
- Butted seams prevent splitting under maximum pressure
- Serrated barrel & flared position of sleeves provide excellent
- contact & mechanical stress relief at insulation & barrel junction • Packed in Zip Lock plastic bags with punched hole for pegboard hanging

| hanging                    |                             |
|----------------------------|-----------------------------|
| General                    |                             |
| Insulation Type            | Vinyl                       |
| Material                   | Copper Tubular/Copper Plate |
| Finish                     | Electro-Tin Plated          |
| Color                      | Red                         |
| Wire Range                 | 22-18                       |
| Stud Size                  | #10                         |
| <b>Dimension Informati</b> | on                          |
| Stock Thickness            | 0.03                        |
| L Inches (mm)              | 0.874                       |
| D Inches (mm)              | 0.157                       |
| D1 Inches (mm)             | 0.067                       |
| D2 Inches (mm)             | 0.209                       |
| E Inches (mm)              | 0.441                       |
| F Inches (mm)              | 0.256                       |
| W Inches (mm)              | 0.319                       |
| T Inches (mm)              | 0.03                        |
| Specifications             |                             |
| Temperature Rating         | 167 <sup>0</sup> F (75°C)   |
| Voltage Rating             | 600 V @105°C                |
| Flammability Rating        | UL94V-O                     |
| Amp Rating                 | 18 Amps                     |
| Packaging                  |                             |
| Bag Qty                    | 25                          |
| Master Bag Qty             | 100                         |
| Certifications             |                             |
| UL                         | Yes                         |
| cUL                        | Yes                         |
| RoHS                       | Yes                         |
|                            |                             |

Morris Products 53 Carey Road, Queensbury, NY 12804 www.morrisproducts.com



| T  |       |    |
|----|-------|----|
| 1  |       | ∫  |
|    | F<br> |    |
| ĻĮ | E     | ĻĮ |
|    |       |    |

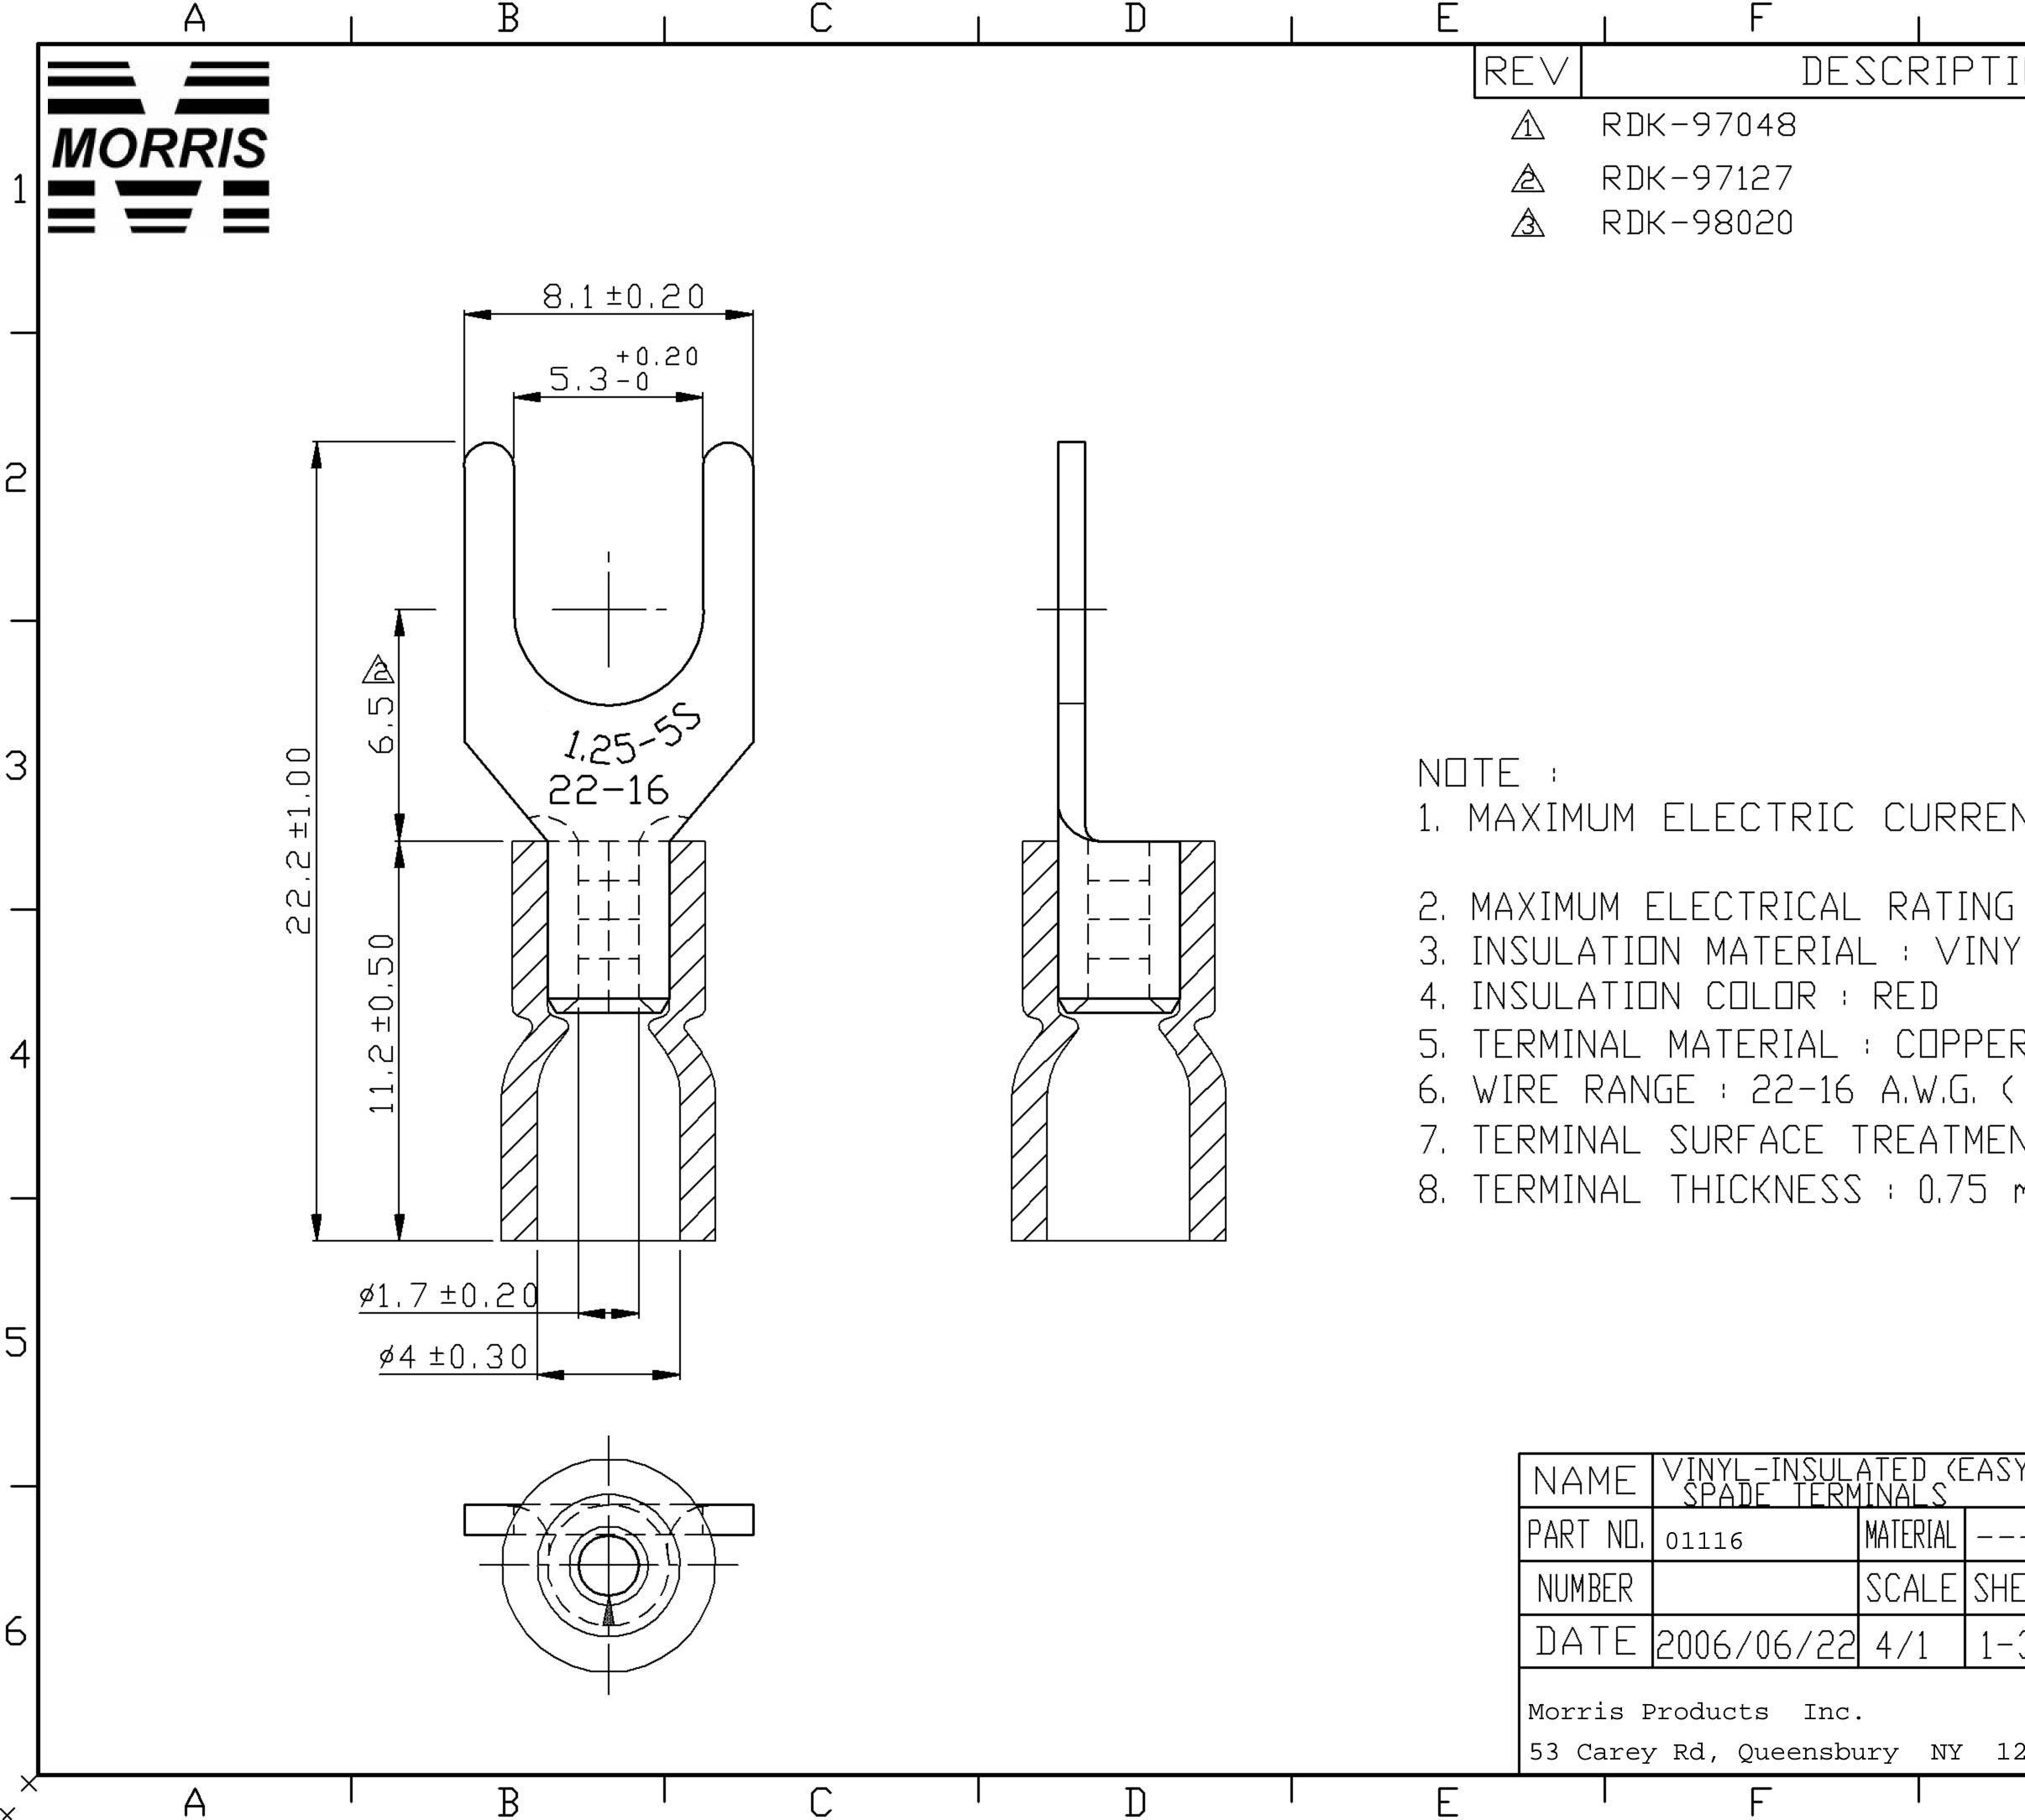

| NAME     | VINYL-INSUL<br>SPADE TERM | ATED (E<br>1INALS | EAS` |
|----------|---------------------------|-------------------|------|
| PART NO. | 01116                     | MATERIAL          |      |
| NUMBER   |                           | SCALE             | SHE  |
| DATE     | 2006/06/22                | 4/1               | 1-   |
| Morris F | Products Inc.             |                   |      |
| 53 Carey | r Rd, Queensbu            | iry NY            | 12   |
|          |                           | I                 |      |

| G I                       | Н   | ×<br>×   |
|---------------------------|---|----------|
| IDN                       | DATE  |          |
|                           | 2009/07/24  |          |
|                           | 2009/07/24<br>2009/07/24                              | 1        |
|                           | 2007/0//24  |          |
|                           |   |          |
|                           |   |          |
|                           |   |          |
|                           |   | 2        |
|                           |   |          |
|                           |   | <b> </b> |
|                           |   |          |
|                           |   | 3        |
| NT: <u>A.W.G.</u><br>AMP. | 22 20 18 16   |          |
|                           | ) VOLTS MAX.  |          |
| 1 : 105°C 600<br>71       | J VULIS MAX.  |          |
|                           |   |          |
| R<br>(0.5-1.5 mm²         |   | 4        |
| NT : TIN PL               |   |          |
| mm                        |   |          |
|                           |   |          |
|                           | erance Unless   |          |
| 0 > mm                    | rwise Specified<br>± ANGLE<br>± 0°> ° REF±            | 5        |
|                           | $\begin{array}{c ccccccccccccccccccccccccccccccccccc$ |          |
| Y ENTRY) UNI              |   |          |
| - <i></i> APPR[           | <b></b>   |          |
| EET PAGE CHECH            | ·   | ~        |
| 3 10F2 DRAV               | WN  | Ь        |
|                           |   |          |

2804

G

Η