




MORRIS CAT#: 12135-12140
Vinyl Insulated Reducing Butt Splice Connectors

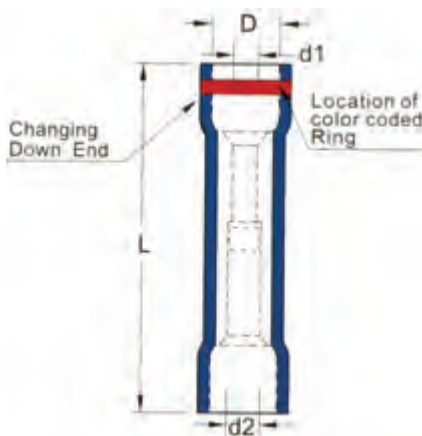

Features:

Vinyl Insulated Reducing Butt Splice Connectors features include:

- Vinyl Insulated Reducing Butt Splice Connector features Step-Down Barrel that allows for Transition from Larger to Smaller Conductor with simple In-Line Splice
- Vinyl Insulated Reducing Butt Splice Connector Material: Electrolytic Tubular Copper
- Electro-Tin Plated for corrosion resistance
- Vinyl Insulated Reducing Butt Splice Connector has Center Wire Stop Barrier
- Maximum Electric Current: 26 AWG - 5.5 Amp, 24 AWG - 7 Amp, 22 AWG - 9 Amp, 20 AWG - 12 Amp, 18 AWG - 17 Amp, 16 AWG - 18 Amp, 14 AWG - 30 Amp, 12 AWG - 35 Amp, 10 AWG - 50 Amp, 8 AWG - 70 Amp, 6 AWG - 95 Amp, 4 AWG - 125 Amp
- 167°F(75°C) 600 Volts Max
- cULus Listed
- Dimension Measurements = Inches
- Order Qty of 100 = 1 Bag of 100

MAXIMUM ELECTRIC CURRENT:

| AWG | 22 | 20 | 18 | 16 | 14 | 12 | 10 |
|-----|----|----|----|----|----|----|----|
| AMP | 9 | 12 | 17 | 18 | 30 | 35 | 50 |

MAXIMUM ELECTRIC RATING: 167°F (75°C) 600 Volts

INSULATION MATERIAL: Vinyl

TERMINAL MATERIAL: Electro-Tin Plated Copper Brazed Seam

DIMENSIONS = INCHES

| CAT. NO. | WIRE RANGE AWG | COLOR CODE | L | D | D1 | D2 | BAG QTY | MASTER BAG QTY |
|----------|----------------|-----------------------|-------|------|------|------|---------|----------------|
| 12135 | 16-14 TO 22-18 | BLUE WITH RED RING | .965 | .177 | .067 | .091 | 100 | 1,000 |
| 12136 | 12-10 TO 22-18 | YELLOW WITH RED RING | 1.22 | .248 | .067 | .134 | 100 | 1,000 |
| 12137 | 12-10 TO 16-14 | YELLOW WITH BLUE RING | 1.22 | .248 | .091 | .134 | 100 | 1,000 |
| 12138 | 8 TO 16-14 | RED WITH BLUE RING | 1.406 | .335 | .091 | .177 | 100 | 1,000 |
| 12139 | 8 TO 12-10 | RED WITH YELLOW RING | 1.406 | .335 | .134 | .177 | 100 | - |
| 12140 | 6 TO #8 | BLUE WITH RED RING | 1.172 | .413 | .177 | .232 | 100 | - |