




Morris CAT#: 15240-15250

Liquid Tight Connectors -  
Straight - Zinc Die Cast

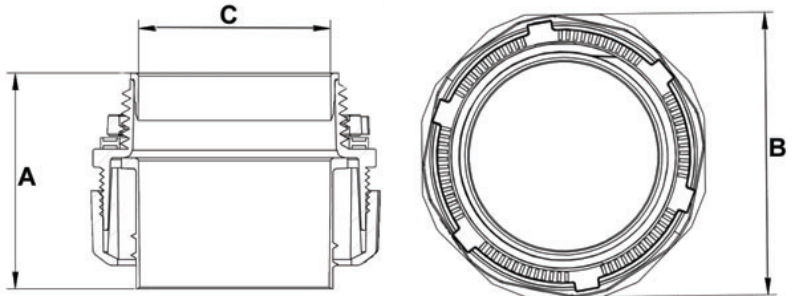

**Features:**

- Terminate and Seal Liquid-tight Flexible Metal Core Conduit to either Oil-tight, Liquid-tight or Rain-tight Box or Enclosure
- Connectors can be used with Tapered Threaded Female Entry or Unthreaded KO using the Sealing Washer and Locknut
- Zinc Die Cast
- cULus or UL/CSA Listed
- Order Qty of 1 = 1 Pieces

DIMENSIONS = INCHES

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C (ID)		
15240	3/8"	1.46	1.30	.42	25	250
15241	1/2"	1.46	1.30	.54	25	250
15242	3/4"	1.46	1.58	.72	15	150
15243	1"	1.87	1.81	.93	8	80
15244	1-1/4"	2.06	2.26	1.26	5	50
15245	1-1/2"	2.07	2.50	1.46	4	40
15246	2"	2.01	3.01	1.89	2	20
15247	2-1/2"	3.33	3.32	2.39	-	12
15248	3"	3.50	4.32	2.95	-	12
15249	3-1/2"	4.05	4.90	3.05	-	6
15250	4"	4.09	5.17	3.83	-	6