




Morris CAT#: 15251-15261
 Liquid Tight Connectors - Straight -
 Insulated Throat - Zinc Die Cast

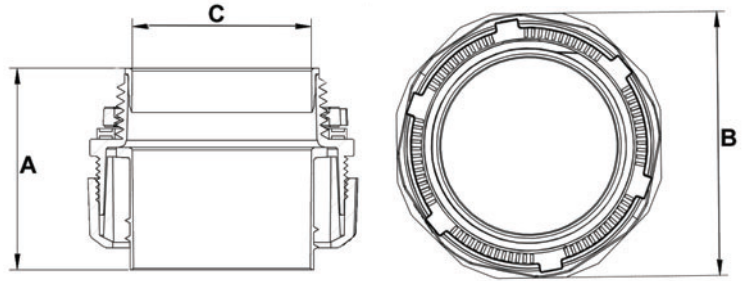

Features:

- Terminate and Seal Liquid-tight Flexible Metal Core Conduit to either Oil-tight, Liquid-tight or Rain-tight Box or Enclosure
- Connector can be used with Tapered Threaded Female Entry or Unthreaded KO using the Sealing Washer and Locknut
- Zinc Die Cast
- UL/CSA Listed
- Order Qty of 1 = 1 Pieces

DIMENSIONS = INCHES

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
15251	3/8"	1.52	1.30	.42	25	250
15252	1/2"	1.52	1.30	.54	25	250
15253	3/4"	1.52	1.58	.72	15	150
15254	1"	1.93	1.81	.93	8	80
15255	1-1/4"	2.08	2.26	1.26	5	50
15256	1-1/2"	2.15	2.50	1.46	4	40
15257	2"	2.08	3.01	1.89	2	20
15258	2-1/2"	3.41	3.72	2.32	-	10
15259	3"	3.58	4.33	2.93	-	10
15260	3-1/2"	4.07	4.86	3.33	-	6
15261	4"	4.17	5.24	3.83	-	6