



Catalog Number See Table
UPC Number
Description Cable Tie - UV Black
 18 Lb Tensile Strength



Features

- Durable Nylon 6/6 Material
- Low Profile Locking Head
- Bent Tip for ease of insertion into locking head

General

Material: Nylon 6/6
Flammability: UL94V-2

Dimension Information

Length: See Table
Width: See Table
Bundle Dia: See Table

Specifications

Temperature Rating Negative 40 to 185^o F
Voltage Rating 600
Flammability Rating UL 94V-2
Tensile Strength: 18 Lbs
UV Rating: UV Resistant Carbonate A additive

Packaging

Bag Qty 100

Certifications

UL Yes
CSA Yes
ROHS Yes

Cat No.	Tensil Strength (Lbs.)	Length (Inches)	Width (Inches)	Max Bundle Dia (Inches)	Bag Qty	Master Bag Qty	Per 100
20212	18	3	0.094	0.71	100	1000	
20214	18	4	0.098	0.99	100	1000	
20216	18	4 3/4	0.098	1.18	100	1000	
20218	18	5 1/2	0.098	1.38	100	1000	
20220	18	6 1/2	0.098	1.73	100	1000	
20222	18	8	0.098	2.17	100	1000	
20294	250	21 5/8	0.5	6.54	100	100	
20296	250	28 1/2	0.5	8.86	100	100	
20298	250	40 1/2	0.5	12.48	100	100	

UL
E97527



14515-99 HH



DNV
E-10035

Lloyds Register
06/10038



40022513



1 2 3 4

A



B

C

D

E

F

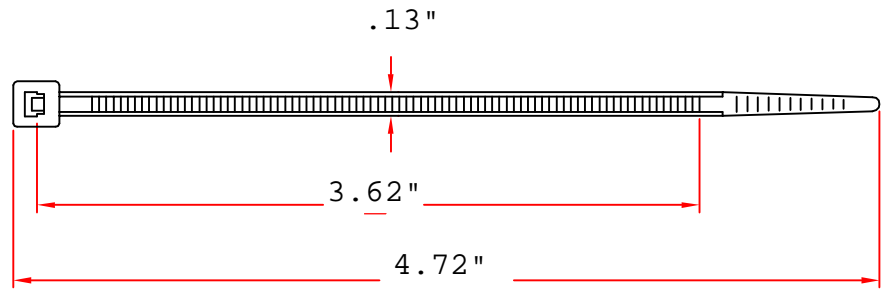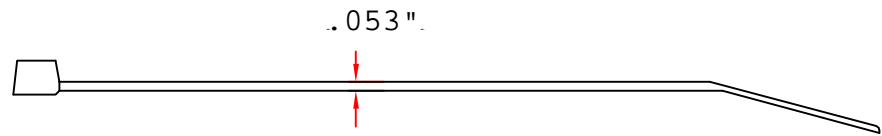

Morris Products
Queensbury NY

MATERIAL: UL 94V-2
NYLON 66

ITEM NO. 20216

SCALE

18 LBS
Tensile

NAME

NYLON CABLE TIE



(. . .)

UV Resistant
Black



05-12-2009
DATE

REVISIONS K002

R.NO.