




73160 - RECESSED EMERGENCY DOWNLIGHT

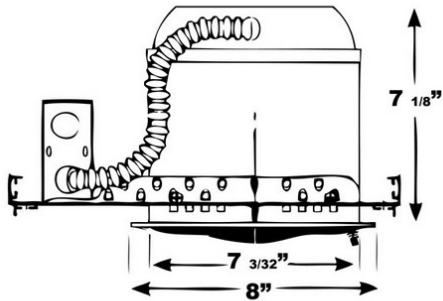

FEATURES:

- Adjustable Ultra-bright 8W bi-pin Halogen Lamp Head.
- Sealed Beam PAR36 type Gimbal Trim with smooth Chrome-plated Metallized Reflector and plastic lens delivering optimal light distribution.
- Dual 120/277 voltage.
- Charge Rate/power "ON" LED Indicator Light and Push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V 4.5ah Maintenance-free, Rechargeable Sealed Lead Acid battery.
- Internal Solid-state Transfer Switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination.
- Fully Automatic Solid-state, Dual-rate Charger initiates battery charging to recharge a discharged battery in 24 hours.
- Steel Mounting Frame and housing.
- Junction Box with 3/4" knockouts for AC input.
- 6" Recessed Housing with mounting bar hangers.
- Impact-resistant Thermoplastic Adjustable Gimbal Trim.
- Trim securely attached to housing with spring clips.
- Compatible with drywall or drop ceiling mount installations.
- Meets UL924, NFPA 101 Life Safety Code, NEC & OSHA Codes
- Temperature Range: 68°F – 86°F
- UL listed for damp locations.

TECHNICAL SPECIFICATIONS:

General

Lamp Type:	8W Bi-Pin Halogen
Housing:	Zinc Plated Steel
Lens Material:	Plastic Fresnel Lens
Mounting:	Steel Mounting Frame

Dimension Information

Diameter:	OD Can 7 3/32"
	OD Trim 8"
Depth:	7 1/8"

Specifications

Voltage:	120/277
Input Current:	.05@120V; .05@277V
Input Watts:	10@120V; 10@277V
Battery:	Lead Acid 6V 4.5ah

Packaging

Box Qty	1
Master Carton Qty	4