




73516 - LED EXIT SIGN

RED LETTERS & LEDs, WHITE HOUSING



REMOTE CAPABLE WITH SELF DIAGNOSTIC

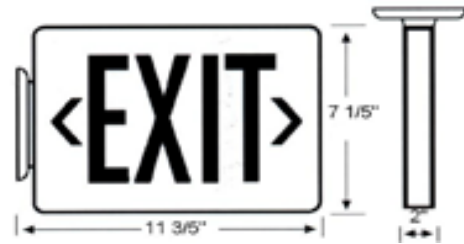

FEATURES:

- Remote Capable Self Diagnostic Test Feature continually diagnoses units performance and tests system to ensure reliable operation and to meet electrical & Life Safety Codes
- Superior Quality Exit Unit Combined with LED Energy Saving Technology
- Completely Self-Contained
- Fully Automatic Operation
- Compact, Low Profile Design in Neutral Finish
- Push to Test Switch in Battery Backup Units
- Automatic, Low Voltage Disconnect (LVD)
- Injection-Molded, UL 94 V-0 Flame Retardant, High Impact Housing
- Charge Rate/Power On LED Indicator Light
- LED Life Expectancy of 50,000+ Hours
- Energy Consumption of Less than 4 Watts for Red Letters
- Red LEDs
- Listed for Damp Location
- Universal Mounting Canopy & 2 Face Plates for Side or Top Installation
- Standard AC and Emergency Units Available
- 900MAH 1.2V Ni-CAD Battery - Unitech AA 900mAh 1.2V or Equal
- 90 Minute Battery Run Time
- Remote Capable - Accommodates up to 2 Additional LED Remote Lamp Heads
- 2 Heads - 3 Hours of Operation (Base Unit)
- 3 Heads - 2 Hours of Operation (Base Unit + 1 Remote Head)
- 4 Heads - 1.5 Hours of Operation (Base Unit + 2 Remote Heads)
- Self Diagnostic Features:
 - On-Line real time monitoring of battery charging, disconnection or failure and local or remote lamp failure
 - Self Testing and 15 Minute discharge every 30 days
 - Self Testing and 90 Minute discharge annually

Part#	Housing Color	LED Color	Battery Backup	Voltage
73516	White	Red	Yes	120/277V

TECHNICAL SPECIFICATIONS:

Packaging:

Box Qty: 1
 Master Carton Qty: 6
 Warranty: 3 Years
 UPC Number: 60198673516

Certifications:

cULus
 RoHS

Specifications:

Input Rating Amps: 18.1 mA @120V, 7.76 mA @ 277V
 Input Rating Watts: 1.64W @ 120V 1.60W @ 277V 60 Hz
 Frequency: Voltage 120/277
 Rating: Flammability UL94V-0
 Rating: Battery
 Operation: 1.2 Volt 900 mAh Ni-Cad -90 Minute Min