




# Datacomm Wallplate For Keystone Jacks and Modular Inserts



**MORRIS CAT#: 88142-88190**

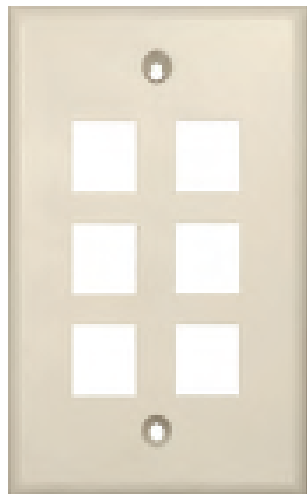

| <i>CAT. NO.</i> | <i>COLOR</i> | <i>PORTS</i> | <i>GANG</i> | <i>BAG QTY</i> |
|-----------------|--------------|--------------|-------------|----------------|
| 88142           | IVORY        | 1            | 1           | 10             |
| 88144           | IVORY        | 2            | 1           | 10             |
| 88146           | IVORY        | 3            | 1           | 10             |
| 88148           | IVORY        | 4            | 1           | 10             |
| 88150           | IVORY        | 6            | 1           | 10             |
| 88162           | WHITE        | 1            | 1           | 10             |
| 88164           | WHITE        | 2            | 1           | 10             |
| 88166           | WHITE        | 3            | 1           | 10             |
| 88168           | WHITE        | 4            | 1           | 10             |
| 88170           | WHITE        | 6            | 1           | 10             |
| 88184           | LT. ALMOND   | 2            | 1           | 10             |
| 88186           | LT. ALMOND   | 3            | 1           | 10             |
| 88188           | LT. ALMOND   | 4            | 1           | 10             |
| 88190           | LT. ALMOND   | 6            | 1           | 10             |

## Features:

- Datacomm wallplate is highly resistant to impact, abrasion, oil, acids and discoloration
- Ideal for use in high-abuse areas
- Mounts to standard junction boxes
- Compatible with all Keystone jacks and Modular Inserts
- Smooth, easy to clean surface
- Round on edges to prevent injury and wall damage
- Supplied with color matching painted metal mounting screws
- Mounting Screws individually wrapped in a small plastic bag to protect plate from scratches
- Specification Grade - meets all current Federal Specifications
- Datacomm wallplate conforms to NEMA & ANSI standards
- Made of Polycarbonate
- Flammability rating UL94V-2
- UL Listed
- Order Qty of 1 = 1 Piece