



Catalog Number	90576
UPC Number	60198690576
Description	Copper Lay-In Grounding Connector



Features

- Manufactured from High Strength High Conductivity Copper Alloy
- Electro-Tin Plated
- Steel Set Screw
- Open Face Lay-In Design
- Dual Rated for Copper & Aluminum Conductors
- Equipment, Ground Grid, Conduit Ground, Solar

General

Material:	Pure Electrolytic Copper
Finish:	Electro-Tin Plated
Screw Type:	Steel
Screw Size:	.41"
Wire Range:	#6 awg - 3/0

Dimension Information

Length:	2.00"
Height:	1.56"
Width:	.800"

Specifications


Temperature Rating	
Voltage Rating	600
Flammability Rating	
Amp Rating	

Packaging

Box Qty	25
---------	----

Certifications


UL	486B
CSA	Yes
RoHS	N/A




TAP 3/8 - 24 UNF-2B X 0.79 DP.
DRILL 0.84 DP.

Ø0.270 THRU

ASM. NO. C00494026
PART NO. C00210026
C00021026




3/8-24 X .875 LG.
SLOTTED STEEL SCREW
C39201002 (1 REQ'D)
ASSEMBLE SCREW SNUG
TO BOTTOM (5-15 IN/LBS)

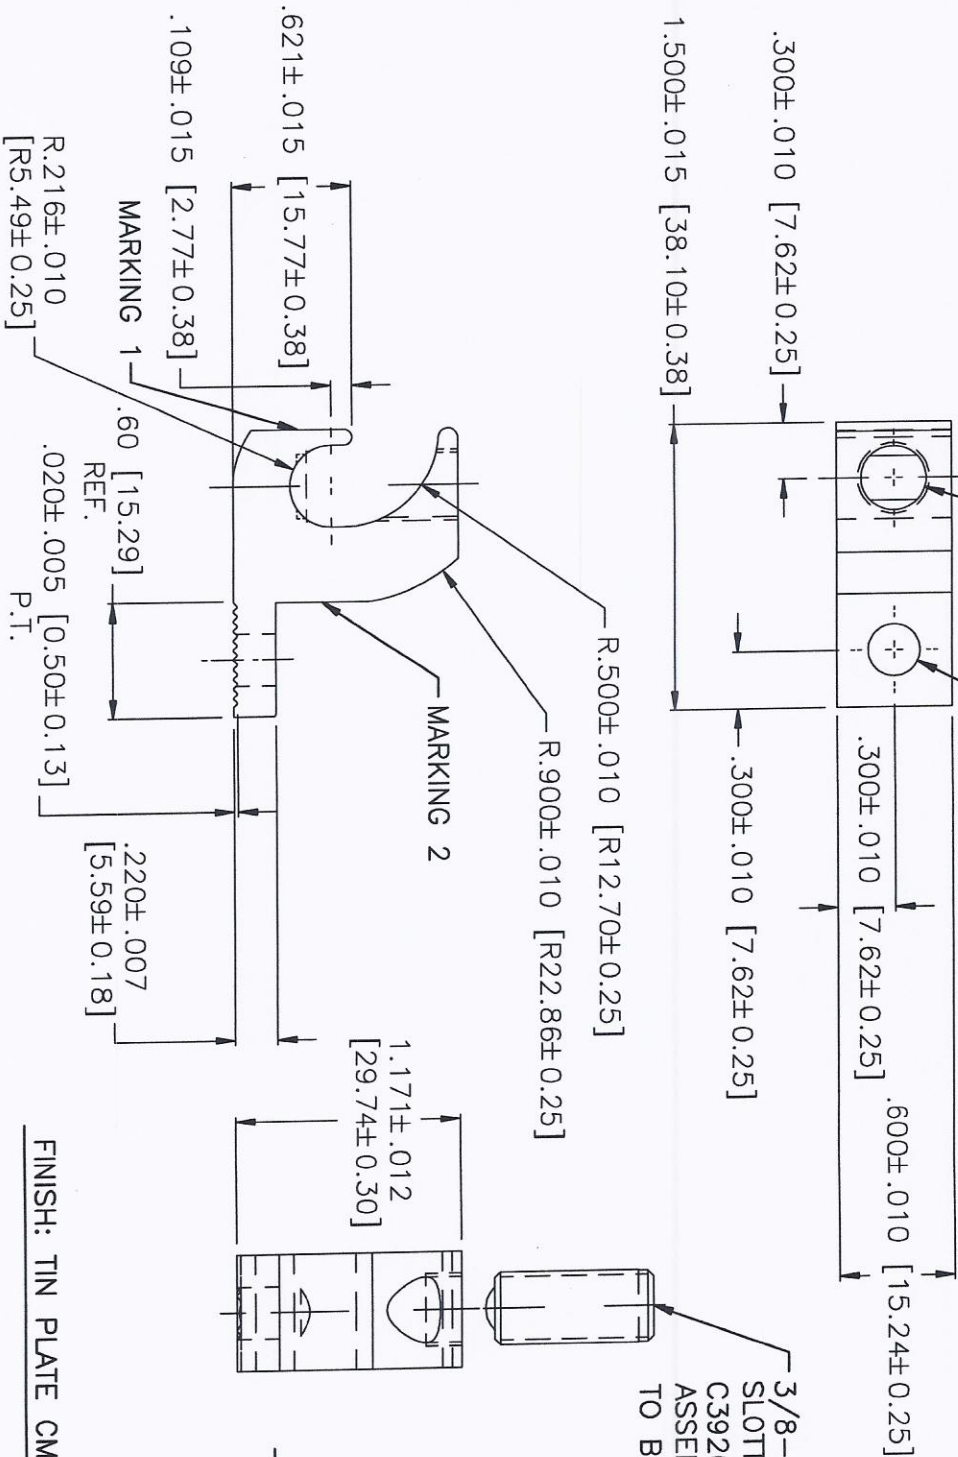

FINISH: TIN PLATE CMS-02

MARKING 1 MARKING 2



UNLESS OTHERWISE SPECIFIED				DRAWN BY DAF		NAME OF PART		CAT. NO.	
.00 = ±.015 .000 = ±.005 ANGLES = ±1/2°				10-29-01		LAY-IN LUG		90576	
[X] = DIMENSION IN MILLIMETERS				CROSS REFERENCE # -		MATERIAL		SCALE	
M REDRAWN ON NEW CAD SYSTEM				719310-01		DAF		2X	
REV.				DESCRIPTION		ENCL		DATE	
CLASS A DOCUMENT									