



Catalog Number See Table
UPC Number
Description Parallel/ Tee Tap
 Aluminum



Features


- Manufactured from High Strength High Conductivity Aluminum Alloy
- Steel Set Screws
- Dual Rated for Copper & Aluminum Conductors
- Parallel or Tee Tap Configurations

General

Material: 6061-T6 High Conductivity Aluminum
Finish: Electro-Tin Plated
Screw Type: Steel Hex Head
Wire Range: #12 awg - 750 MCM

Dimension Information

See Table



Specifications

Temperature Rating: N/A
Voltage Rating: 600
Flammability Rating: N/A
Amp Rating: To Conductor

Packaging

Box Qty See Table


Certifications

UL 486B AL9CU
cUL Yes
RoHS Yes

Cat No.	AWG	Main Wire	Tap Wire	Box Qty	L	W	H	
91012	2	2-12	4-14	50	1.39	0.63	0.88	
91014	1/0	1/0-2	1/0-14	25	1.75	0.75	1	
91016	250-1/0	250-1/0	1/0-14	25	2.25	1	1.31	
91018	250	250-1/0	250-6	12	2	1	1.31	
91020	350	350-4/0	350-6	12	2.56	1.25	1.44	
91022	500	500-350	500-2	12	3.13	1.38	1.75	
91023	750	750-500	500-2	6	3.38	1.5	2	

www.morrisproducts.com

Morris Products Inc. 53 Carey Rd. Queensbury NY 12804




3/8-24 UNF-2A X .562 LG. SLOTTED
ALUM. SCREW C00202008 (1 REQ'D)
ASSEMBLE SCREW FLUSH TO TDP

5/16-24 UNF-2A X .406 LG. SLOTTED
ALUM. SCREW C48202012 (1 REQ'D)
ASSEMBLE SCREW FLUSH TO TDP

ASM. NO.	C00496090
PART NO.	

MARKING

ONE SIDE	OTHER SIDE
MAIN 2-12	④ ⑤
TAP 4-14 CU 4-12 AL	Y 90C

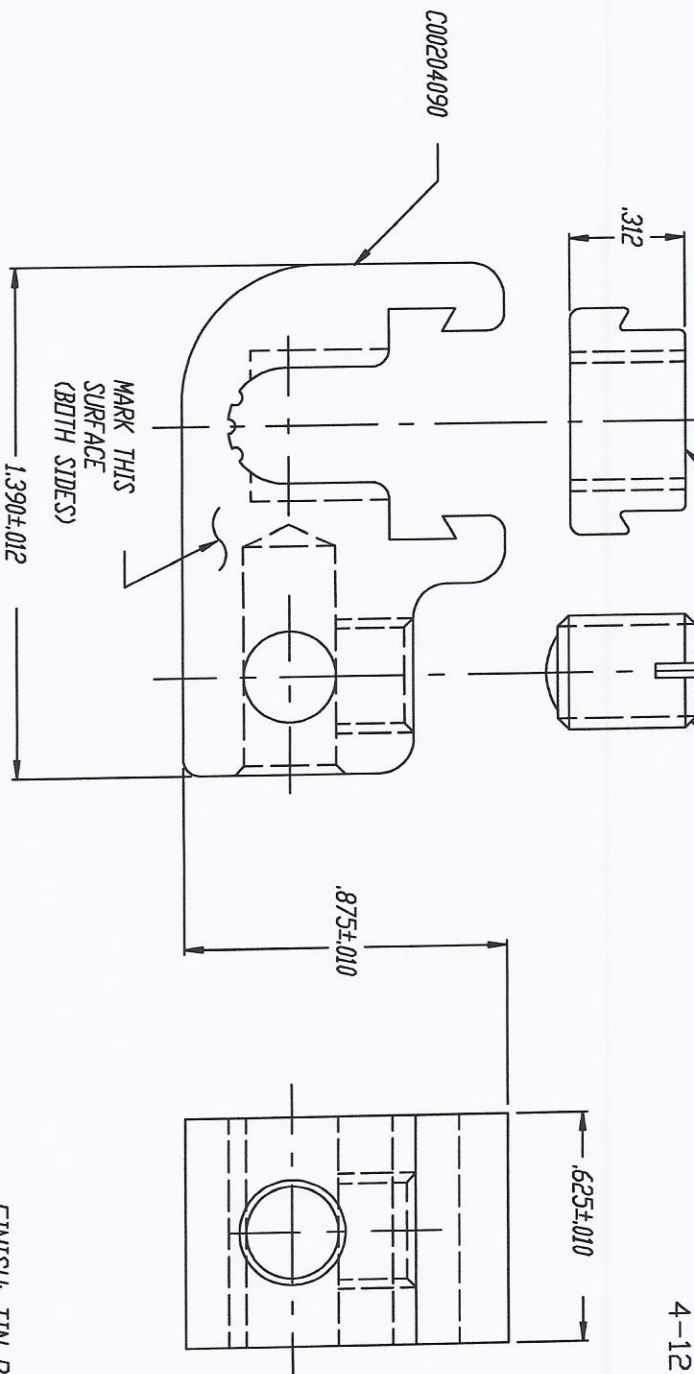

FINISH: TIN PLATE CMS-02

REV.	DESCRIPTION	ECN	DATE	INIT.	UNLESS OTHERWISE SPECIFIED .00 = ±.015 .000 = ±.005 ANGLES = ±1/2°	DRAWN BY AWP 7-17-98	NAME OF PART GUTTER TAP ASSEMBLY	CAT. NO. 91012
A	REMOVED SIDE HOLE C-SINK'S		12-98	DAF			MATERIAL 6061-T6 ALUM.	SCALE 2X
CROSS REFERENCE # - 5E35-98117-0								

CLASS A DOCUMENT

Morris Products Inc Queensbury NY