




# ANTI-OXIDANT

**MORRIS CAT#'s: 99901-99908**

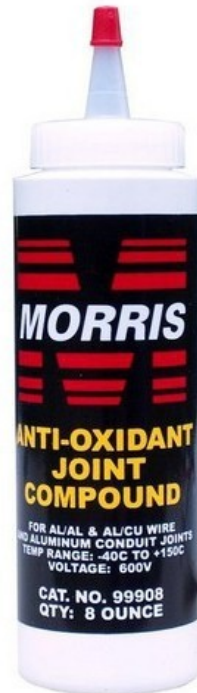

<i><b>CAT. NO.</b></i>	<i><b>SIZE</b></i>	<i><b>MOQ</b></i>
99901	1 OUNCES	1
99904	4 OUNCES	1
99908	8 OUNCES	1

## **Features:**

1. High conductivity anti-oxidant for AL/AL and AL/CU wire connections and aluminum conduit joints
2. For use with all types of pressure type wire connectors including screw-on, tap, service entrance and split bolts
3. High conductivity carrier material excludes air to prevent further oxidation
4. Reduces galling and seizing and corrosion
5. Promotes good ground continuity through the joint
6. Improves efficiency & service life of aluminum electrical applications
7. Temperature range: -40°F to 302°F(-40°C to 150°C)
8. Voltage: 600v
9. Provides additional inter-strand and inter-conductor current paths for improved conductivity and cooler applications
10. Suspended zinc particles penetrate and cut aluminum oxide
11. Order Qty of 1 = 1 Piece