




Liquid Tight Connectors - Straight - Zinc Die Cast



DIMENSIONS = INCHES

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
15240	3/8"	1.46	1.20	0.48	25	250
15241	1/2"	1.46	1.20	0.56	25	250
15242	3/4"	1.46	1.46	0.71	15	150
15243	1"	1.87	1.69	0.94	8	80
15244	1-1/4"	2.06	2.17	1.24	5	50
15245	1-1/2"	2.07	2.44	1.45	4	40
15246	2"	2.01	2.87	1.86	2	20
15247	2-1/2"	3.33	3.39	2.22	-	12
15248	3"	3.50	4.09	2.76	-	12
15249	3-1/2"	4.05	4.90	3.05	-	6
15250	4"	4.09	5.04	3.62	-	6

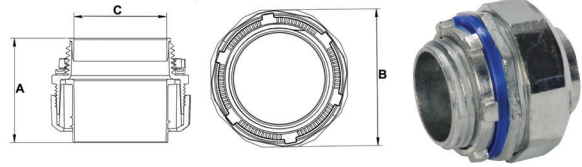


- Terminate and Seal Liquid-tight Flexible Metal Core Conduit to either Oil-tight, Liquid-tight or Rain-tight Box or Enclosure
- Connectors can be used with Tapered Threaded Female Entry or Unthreaded KO using the Sealing Washer and Locknut



Liquid Tight Connectors - Straight - Insulated - Zinc Die Cast

DIMENSIONS = INCHES

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
15251	3/8"	1.52	1.20	0.48	25	250
15252	1/2"	1.52	1.20	0.56	25	250
15253	3/4"	1.52	1.46	0.71	15	150
15254	1"	1.93	1.69	0.94	8	80
15255	1-1/4"	2.08	2.17	1.24	5	50
15256	1-1/2"	2.15	2.44	1.45	4	40
15257	2"	2.08	2.87	1.86	2	20
15258	2-1/2"	3.41	3.39	2.22	-	10
15259	3"	3.58	4.09	2.76	-	10
15260	3-1/2"	4.07	4.86	3.33	-	6
15261	4"	4.17	5.04	3.62	-	6

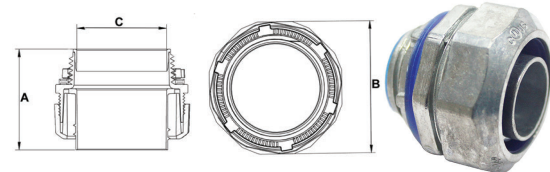


- Terminate and Seal Liquid-tight Flexible Metal Core Conduit to either Oil-tight, Liquid-tight or Rain-tight Box or Enclosure
- Connector can be used with Tapered Threaded Female Entry or Unthreaded KO using the Sealing Washer and Locknut



90° Liquid Tight Connectors - Zinc Die Cast

DIMENSIONS = INCHES

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
15280	3/8"	0.48	1.26	2.04	15	150
15281	1/2"	0.56	1.26	2.10	15	150
15282	3/4"	0.71	1.52	2.36	10	100
15283	1"	0.94	1.77	2.93	5	50
15284	1-1/4"	1.24	2.20	3.34	4	40
15285	1-1/2"	1.45	2.46	3.74	2	20
15286	2"	1.86	2.93	4.21	1	10
15287	2-1/2"	2.22	3.54	5.31	-	6
15288	3"	2.76	4.25	6.47	-	4
15289	3-1/2"	3.54	4.86	6.47	-	3
15290	4"	3.62	5.24	6.90	-	3

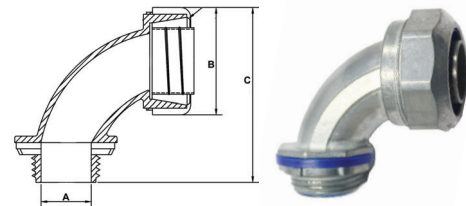


- 90° Orientation
- Terminate and Seal Liquid-tight Flexible Metal Core Conduit to either Oil-tight, Liquid-tight or Rain-tight Box or Enclosure
- Connectors can be used with Tapered Threaded Female Entry or Unthreaded KO using the Sealing Washer and Locknut



90° Liquid Tight Connectors - Insulated Throat - Zinc Die Cast

DIMENSIONS = INCHES

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
15291	3/8"	.48	1.26	2.09	15	150
15292	1/2"	.56	1.26	2.15	15	150
15293	3/4"	.71	1.52	2.69	10	100
15294	1"	.94	1.77	2.98	5	50
15295	1-1/4"	1.24	2.20	3.40	4	40
15296	1-1/2"	1.45	2.46	3.80	2	20
15297	2"	1.86	2.93	4.27	1	10
15298	2-1/2"	2.22	3.54	5.39	-	6
15299	3"	2.76	4.25	6.13	-	4
15300	3-1/2"	3.33	4.86	6.55	-	3
15301	4"	3.62	5.24	6.98	-	3

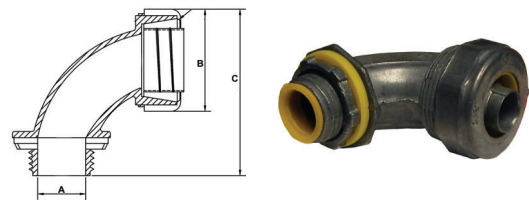

- 90° Orientation
- Terminate and Seal Liquid-tight Flexible Metal Core Conduit to either Oil-tight, Liquid-tight or Rain-tight Box or Enclosure
- Connectors can be used with Tapered Threaded Female Entry or Unthreaded Knockout using the Sealing Washer and Locknut provided

Liquid Tight