




MORRIS CAT#: G14090 Electrical Mast Roof Flashing

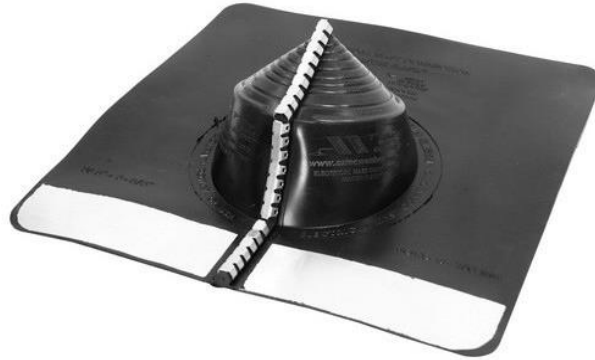

Features:

- Flexible EPDM Rubber Base with Flexible Soft Aluminum Strip designed to seal to most panel configurations and roof pitches regardless of pipe location
- Resists Ozone and UV Light
- One Piece Construction for Fast Installation
- -67°F to +212°F
- IAMPO Cert. No. 3121 Approved for use with Type B Vents
- For use for Shingle Roof Applications
- Not for hot mopped or built up roofs
- Cannot use Petroleum based products or paint on flashing collar or plastic

CAT. NO.	OUTSIDE DIAMETER OF PIPE TO BE FLASHED	BASE		CASE QTY	WT/ CASE
		LENGTH	WIDTH		
G14090	1/4" TO 5-3/8"	15"	15"	4	2