



Transformers



CAT. NO.	PRIOR CAT. NO.	INCOMING/HIGHER PRIMARY VOLTAGE	VA RATING	OUTGOING/REDUCE SECONDARY RATING	MOUNTING TYPE	TERMINAL TYPE	CASE QTY
-	34-20241*	120	20	24	PLATE	WIRE LEAD	18
TPM12040	TT1401	120	40	24	PLATE	WIRE LEAD	18
-	34-50243*	120/208/240	50	24	PLATE	WIRE LEAD	18
TPM43448	TT2403	120/208/240	48	24/12/2.5	MULTI	WIRE LEAD	18
TPF32440	T240 4	120/208/240	40	24/12/2.5	FOOT	WIRE LEAD	30
TPM10048P	34-10244*	208/240/480	100	24/120	MULTI	WIRE LEAD	12
TPF27440	34-40242*	277	40	24	FOOT	WIRE LEAD	30

* PRIOR CATALOG NUMBERS IN RED ARE AVAILABLE WHILE SUPPLIES LAST


Sequencers



- Full-load rated auxiliary contacts
- Standard operating ambient between -50°F (-45.5°C) and 165°F (73.8°C)
- Shock and vibration resistant
- Solid state
- Quick-connect terminals
- Mounts in any position

CAT. NO.	PRIOR CAT. NO.	NO. OF TIMINGS	NO. OF SWITCHES	SWITCH CONFIG. (NORMALLY OPEN)	DELAY ON TIME	DELAY OFF TIME	CASE QTY
THS24A341	THDR-101	1	1	SPST	1-20	40-110	50
THS24A342	THDR-102	1	1	SPST	30-90	1-30	50
THS24A343	THDR-201	1	2	DPST	1-20, 1-20	40-110, 40-110	50
THS24A344	THDR-202	1	2	DPST	30-90, 30-90	1-30, 1-30	50
THS24A345	THDR-221	2	3	DPST-SPST	1-110, 1-110, 1-110	1-110, 1-110, 1-110	50
THS24A346	THDR-222	2	4	2-DPDT	1-110 * 4	1-110 * 4	50
THS24A3414	-	4	5	2-DPDT-SPST	1-160 * 5	1-160 * 5	50

Fan Centers

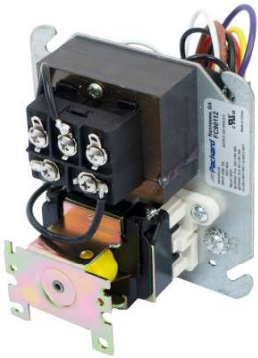

- UL Recognized 40 VA Transformer
- Color Coded Leads
- Low Voltage Terminal Board

CAT. NO.	VOLTAGE	PRIMARY CONNECTIONS	VOLTAGE	SECONDARY CONNECTIONS	RELAY	CASE QTY
TFC90112	120	LEADS	24	TERMINAL BOARD	DPDT	12
TFC90113	120	LEADS	24	TERMINAL BOARD	SPDT	12
TFC90118	120	LEADS	24	TERMINAL BOARD	SPNO/SPNC	12
TFC90119	208/240	LEADS	24	TERMINAL BOARD	SPDT	12
TFC90130	120/208/240	LEADS	24	TERMINAL BOARD	DPDT	12


Adjustable Delay on Break Timer




- Universal voltage operation
- Higher 1.5 amp power rating
- Simple 2-wire hookup
- Knob-adjustable time delays

CAT. NO.	PRIOR CAT. NO.	DESCRIPTION	CASE QTY
TICM206	TADB-1	ADJUSTABLE DELAY ON BREAK	25

Adjustable Delay on Make Timer



- Universal voltage operation
- Higher 1.5 amp power rating
- Simple 2-wire hookup
- Knob-adjustable time delays



CAT. NO.	PRIOR CAT. NO.	DESCRIPTION	CASE QTY
TICM102	TADM-1	ADJUSTABLE DELAY ON MAKE	10
TICM102F	TADM-2	ADJUSTABLE DELAY ON MAKE W/WIRE LEADS	10