


7 Mil Professional Grade Electrical Tape



- 3/4" X 66Ft X 7Mil
- All Weather Professional Grade Splicing Tape used as Primary Insulation up to 600V and as a Protective Outer Jacket up to 69KV
- Flame Retardant & Weather Resistant
- Excellent Cold Weather Resistant Properties -1°F to 221°F (-18°C to 105°C)
- High Dielectric Strength, High Adhesion and Shear
- Highly Elastic Polymeric Vinyl Backing - Excellent Elongation
- Resistant to acids, alkalis, chemicals, oils, moisture and corrosion
- UL 510 & CSA 22.2 Approved
- ASTM-D-3005 HH-I-595C
- Lead Free

COMPARABLE TO 3M 33+ & 35

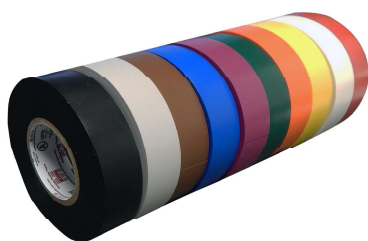

CAT. NO.	COLOR	SIZE	PACKAGING TYPE	CASE QTY
60110	BLACK	3/4" X 66FT	PLASTIC CUP	100
60111	RED	3/4" X 66FT	PLASTIC CUP	100
60112	WHITE	3/4" X 66FT	PLASTIC CUP	100
60113	YELLOW	3/4" X 66FT	PLASTIC CUP	100
60114	GREEN	3/4" X 66FT	PLASTIC CUP	100
60115	BLUE	3/4" X 66FT	PLASTIC CUP	100
60116	BROWN	3/4" X 66FT	PLASTIC CUP	100
60117	ORANGE	3/4" X 66FT	PLASTIC CUP	100
60118	GRAY	3/4" X 66FT	PLASTIC CUP	100

8.5 Mil Professional Grade Heavy Duty Electrical Tape



- 8.5Mil
- Heavier thickness for added mechanical & electrical protection
- All Weather Professional Grade Splicing Tape used as Primary Insulation up to 600V and as a Protective Outer Jacket up to 69KV
- Flame Retardant & Weather Resistant
- Excellent Cold Weather Resistant Properties -1°F to 221°F (-18°C to 105°C)
- High Dielectric Strength, High Adhesion and Shear
- Highly Elastic Polymeric Vinyl Backing - Excellent Elongation
- Resistant to acids, alkalis, chemicals, oils, moisture and corrosion
- UL 510 & CSA 22.2 Approved
- ASTM-D-3005 HH-I-595C
- Mil Spec Approved - MIL-I-24391C
- Lead Free

COMPARABLE TO 3M SUPER 88

CAT. NO.	COLOR	SIZE	PACKAGING TYPE	CASE QTY
60205	BLACK	3/4" X 66FT	PLASTIC CUP	100
60206	BLACK	2" X 66FT	CELLO	40
60207	BLACK	2" X 108FT	CELLO	40