


Copper Split Bolt Connectors - Direct Burial



- ▶ UL listed for Copper and Copper Weld stranded wires only
- ▶ Manufactured from Compact, High Strength, High Copper Content Alloy
- ▶ Free Running Threads and Easy To Grip Wrench Flats
- ▶ Highly resistant to cracking and corrosion
- ▶ Provides a Maximum Pressure and ensures a Secure Connection on all combinations of connectors
- ▶ UL 467 Listed for Direct Burial & Grounding/Bonding Applications
- ▶ Rated 600 Volts

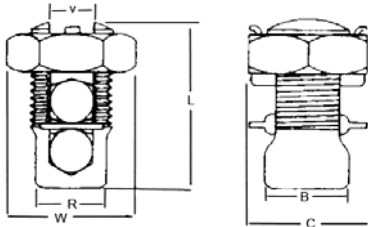

**UL467 Listed
Suitable For
Direct Burial &
Grounding/Bonding**


Dimensions = Inches

Cat. No.	Awg	Max Run To Max Tap	Min Run To Min Tap	Max Run To Min Tap	Min Equal Tap & Run	Torque In-Lb	B	C	L	R	V	W	Box Qty
90314	8	8-8	10-16	8-16	10-10	88	.472	.562	.854	.413	.145	.650	100
90316	6	4-4	8-14	4-14	8-8	165	.492	.625	.906	.413	.165	.722	100
90318	4	4-4	6-14	4-14	8-8	165	.709	.812	1.16	.579	.268	.938	50
90319	3	3-3	6-6	3-12	6-6	225	.600	.750	1.50	.600	.260	.750	50
90320	2	2-2	6-14	2-14	6-6	275	.748	.812	1.26	.614	.326	.938	50
90322	1/0	1/0-1/0	2-14	1/0-14	4-4	385	.787	.937	1.54	.708	.374	1.08	50
90324	2/0	2/0-2/0	1-14	2/0-14	2-2	385	.866	1.06	1.69	.807	.421	1.28	25
90326	3/0	3/0-3/0	2/0-8	3/0-8	1-1	500	1.10	1.25	2.09	.976	.531	1.45	25
90328	4/0-250	250-250	4/0-8	250-8	1-1	500	1.10	1.25	2.09	1.06	.579	1.45	25
90330	350	350-350	350-1/0	350-1/0	2/0-2/0	650	1.22	1.50	2.36	1.18	.700	1.73	12
90332	500	500-500	500-2/0	500-2/0	300-300	825	1.34	1.75	2.84	1.34	.815	2.10	12
90334	750	750-750	750-350	750-#8	350-350	1000	1.94	2.31	3.51	1.94	1.02	2.31	1
90335	1000	1000-1000	1000-500	1000-#8	500-500	1150	2.19	2.56	3.90	2.19	1.17	2.56	1

Copper Split Bolt Connectors - With Spacer - Direct Burial



- ▶ UL listed for Copper and Copper Weld stranded wires only
- ▶ Manufactured from Compact, High Strength, High Copper Content Alloy
- ▶ Uniform Bright Electro-Tin Plating resists corrosion, Reduces Contact Resistance for Maximum Conductivity
- ▶ Spacer Separates Dissimilar Conductors and provides Enhanced Surface Contact Area preventing intermittent contact between run & tap connectors
- ▶ Free Turning Threads and easy to grip wrench flats
- ▶ Highly resistant to cracking and corrosion
- ▶ UL 467 Listed for Direct Burial & Grounding/Bonding Applications
- ▶ Rated for 600 Volts

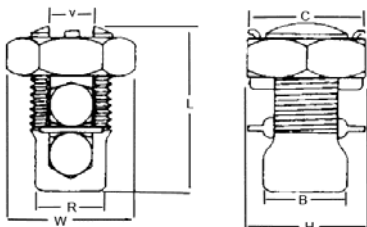

**UL467 Listed
Suitable For
Direct Burial &
Grounding/Bonding**

Dimensions = Inches

Cat. No.	Awg	Max Run To Max Tap	Min Run To Min Tap	Max Run To Min Tap	Min Equal Tap & Run	Torque In-Lb	B	C	H	L	R	V	W	Box Qty
90360	3/0	3/0-3/0	2/0-8	3/0-8	1-1	500	1.10	1.25	1.520	2.20	.976	.531	1.45	25
90362	4/0-250	250-250	4/0-8	250-8	1-1	500	1.10	1.25	1.574	2.22	1.06	.579	1.45	25
90364	350	350-350	350-1/0	350-1/0	2/0-2/0	650	1.22	1.50	1.771	2.56	1.18	.700	1.73	12
90366	500	500-500	500-2/0	500-2/0	300-300	825	1.34	1.75	1.968	2.95	1.34	.815	2.10	12