


Motion Activated Security Lights LED Series

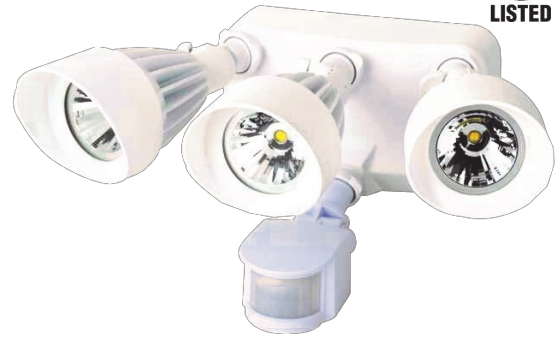


LED Lighting

- ▶ Turns Lights on Automatically When Motion is Detected
- ▶ Ideal for Walkways, Entrances and Patios
- ▶ Provides Years of Trouble-Free Service
- ▶ Time/Lux Adjustable Motion Sensitivity, Light Sensitivity & Time Delay Settings from 10 seconds to 10 Minutes
- ▶ Durable Die Cast Aluminum IP65 Weather Resistant Housing
- ▶ Can be Wall or Eave Mounted to standard Junction Box
- ▶ Tempered Glass Lens
- ▶ Fluted Prismatic Reflector
- ▶ Gasketed for Recessed or Surface Mount
- ▶ 25,000 Hour Driver/Lamp Life Expectancy
- ▶ Operating Temperature: -4°F to 122°F
- ▶ AC 120V/240V 60 Hz Voltage
- ▶ Philips LUXEON M LEDs
- ▶ Each Lamp Head has 20° Beam Angle
- ▶ Up to 240° Detection Angle out to 60Ft
- ▶ CRI: 75
- ▶ Color Temp: 3000K or 5000K
- ▶ 5 Year Warranty

CC11

Cat. No.	Description	Housing Color	Color Temperature	Watts	Lumens	Replaces Incandescent	Case Qty
72560	One Head Unit	Bronze	3000K	14	1030	75W	8
72561	One Head Unit	White	3000K	14	1030	75W	8
72566	One Head Unit	Bronze	5000K	14	1030	75W	8
72567	One Head Unit	White	5000K	14	1030	75W	8
72562	Two Head Unit	Bronze	3000K	24	2060	2 X 75W	8
72563	Two Head Unit	White	3000K	24	2060	2 X 75W	8
72568	Two Head Unit	Bronze	5000K	24	2060	2 X 75W	8
72569	Two Head Unit	White	5000K	24	2060	2 X 75W	8
72564	Three Head Unit	Bronze	3000K	36	3090	3 X 75W	8
72565	Three Head Unit	White	3000K	36	3090	3 X 75W	8
72570	Three Head Unit	Bronze	5000K	36	3090	3 X 75W	8
72571	Three Head Unit	White	5000K	36	3090	3 X 75W	8

WorkLights LED Series

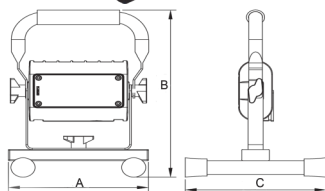

- ▶ Portable LED Worklights
- ▶ 5Ft Power Cord
- ▶ Adjustable Fixture Angle
- ▶ Integral Cooling Fins Release Heat Efficiently
- ▶ Corrosion Resistant Die Cast Aluminum Housing
- ▶ Polycarbonate Lens
- ▶ Superior Architectural Powder Coat Finish
- ▶ Stainless Steel Hardware
- ▶ Input Voltage: 120 VAC
- ▶ 50,000+ Hour LED Life Expectancy
- ▶ Color Temperature: 5000K
- ▶ Light Pattern: 120° V X 90°H
- ▶ Operating Temperature: -40°F To 131°F
- ▶ IP65 Rated (NEMA 4X) Dust & Water Tight
- ▶ cULus Listed for Wet Locations
- ▶ 5 Year Warranty

Cat. No.	Watts	Color Temperature	Delivered Lumens	Replaces Incandescent	Dimensions (Inches)			Case Qty
					A	B	C	
71990	15	5000K	1300	100W	6	9	6	8
71991	30	5000K	2600	200W	8-5/8	10-1/2	7-1/4	4
71992	50	5000K	4700	300W	10-3/8	11-3/4	7-1/4	4