


- ▶ Plastic cap molded by strong, durable UL94V-2 flame retardant thermoplastic
- ▶ Swept-back easy wings designed to provide firm & comfortable twisting
- ▶ Inserted with fixed square-wire spring, grabs wires quickly & firmly
- ▶ Color coded to industry standard
- ▶ Compact design perfect for tight spaces
- ▶ Rated 600 Volt, 1000 Volt Max. in lighting fixtures & signs

Dimensions = Inches

Cat. No.	Color	Wire Combinations	A	B	C	D	E	Box Qty	Case Qty
Hanging Bag 25 Pack									
23254	Yellow	No.10 Thru 22 Awg	.287	.429	.492	.417	.992	25	1,250
23256	Red	No.6 Thru 22 Awg	.358	.520	.583	.453	1.161	25	1,250
Boxed 100 Pack									
23054	Yellow	No.10 Thru 22 Awg	.287	.429	.492	.417	.992	100	6,000
23056	Red	No.6 Thru 22 Awg	.358	.520	.583	.453	1.161	100	4,800
Bulk 500 Pack									
23154	Yellow	No.10 Thru 22 Awg	.287	.429	.492	.417	.992	500	5,000
23156	Red	No.6 Thru 22 Awg	.358	.520	.583	.453	1.161	500	5,000
Small Jar									
23354	Yellow	No.10 Thru 22 Awg	.287	.429	.492	.417	.992	250	8,000
23356	Red	No.6 Thru 22 Awg	.358	.520	.583	.453	1.161	100	3,200
Large Jar									
23454	Yellow	No.10 Thru 22 Awg	.287	.429	.492	.417	.992	600	7,200
23456	Red	No.6 Thru 22 Awg	.358	.520	.583	.453	1.161	400	4,800
Handy Pack									
23554	Yellow	No.10 Thru 22 Awg	.287	.429	.492	.417	.992	250	4,000
23556	Red	No.6 Thru 22 Awg	.358	.520	.583	.453	1.161	170	2,720

High Temperature Wire Connectors

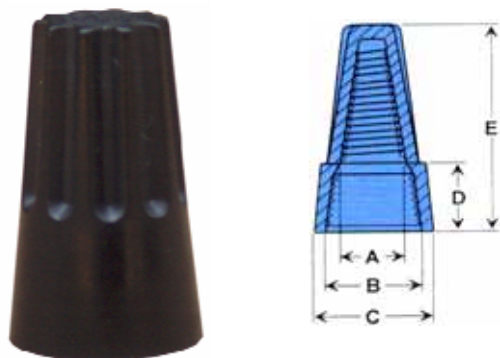

- ▶ Black thermoplastic shell specially designed to withstand the extreme heat build-up commonly found in high-wattage light fixture and signs
- ▶ 302°F (150°C)

Dimensions = Inches

Cat. No.	Type	Wire Combinations	Max Volts	A	B	C	D	E	Bag Qty	Case Qty
23161	P1	No.22 Thru 16 Awg	300V	.150	.264	.339	.228	.598	1000	20,000
23163	P3	No.22 Thru 14 Awg	600V 1000V fixtures & Signs	.197	.390	.480	.307	.866	500	5,000