

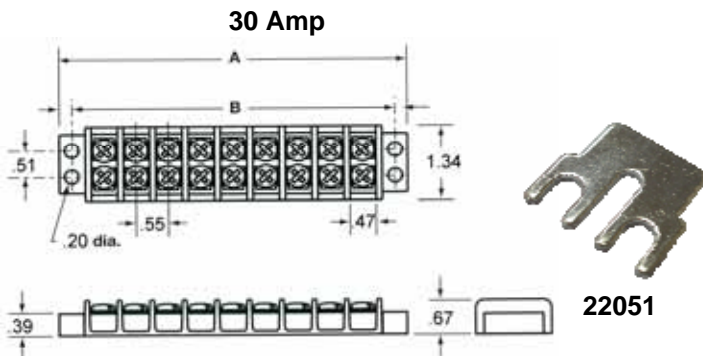


Terminal Strips

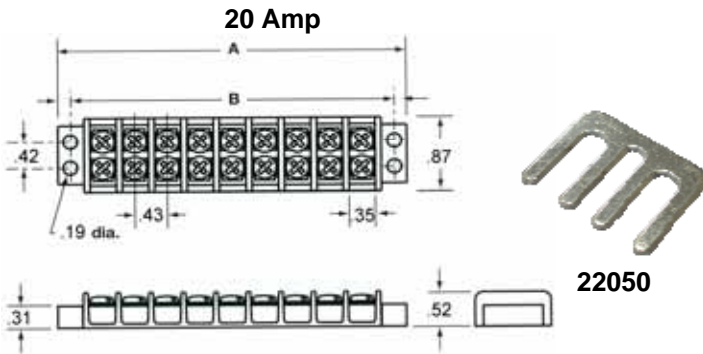

- ▶ Terminal Strips are a popular alternative to splicing
- ▶ High density circuitry can be attained to conserve space
- ▶ Rated: UL 300VAC CSA 600VAC
- ▶ .562" Center Spacing
- ▶ Insulation Withstands Voltage: AC 2000V/min
- ▶ Insulation Resistance: 1000M at DC500V
- ▶ Temperature Range: -40°F to 248°F (-40°C to 120°C)
- ▶ Screw Torque Value: 18 Kg-cm
- ▶ Wire Range Awg: 12-22 Str
- ▶ Insulator Body: Plastic Nylon 66 (UL 94V-0)
- ▶ Brass Tin Plated Terminals 0.8t
- ▶ Terminal Screws: M4 Nickel plated Brass

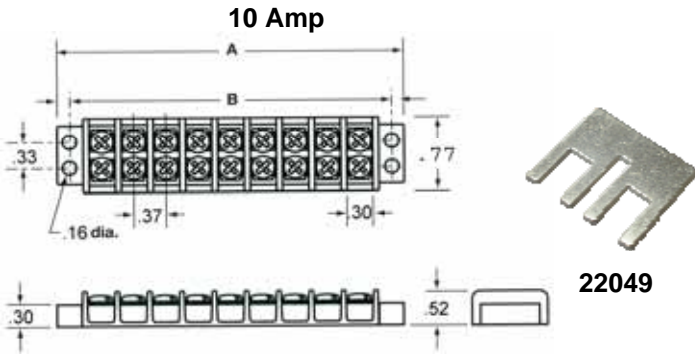

Terminal Strips - 10A

Cat No.	Poles	A	B	Bag Qty
Bag - 10 Pack				
22033	2	1.41"	1.12"	10
22034	4	2.16"	1.87"	10
22035	6	2.91"	2.54"	10
22036	8	3.36"	3.37"	10
22037	10	4.41"	4.15"	10
22038	12	5.16"	4.86"	10

Jumper Bar				
22049	Jumper			10

Terminal Strips - 20A

Cat No.	Poles	A	B	Bag Qty
Bag - 10 Pack				
22042	2	1.64"	1.29"	10
22043	4	2.50"	2.15"	10
22044	6	3.36"	3.00"	10
22045	8	4.22"	3.86"	10
22046	10	5.07"	4.72"	10
22047	12	5.93"	5.58"	10

Jumper Bar				
22050	Jumper			10

Terminal Strips - 30A

Cat No.	Poles	A	B	Bag Qty
Header Card - 2 Pack				
22122	2	2.05"	1.65"	2
22123	3	2.60"	2.20"	2
22124	4	3.15"	2.76"	2
22126	6	4.25"	3.86"	2
22128	8	5.35"	4.96"	2
22130	10	6.46"	6.06"	2
22132	12	7.56"	7.17"	2

Bag - 10 Pack				
22022	2	2.05"	1.65"	10
22023	3	2.60"	2.20"	10
22024	4	3.15"	2.76"	10
22026	6	4.25"	3.86"	10
22028	8	5.35"	4.96"	10
22030	10	6.46"	6.06"	10
22032	12	7.56"	7.17"	10

Jumper Bar				
22051	Jumper Bar			10