

Non-Insulated Flag Female Disconnects



Fig 1

Fig 2

Fig 3

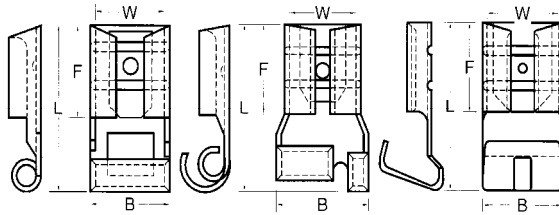


Fig 1

Fig 2

Fig 3

MAXIMUM ELECTRIC CURRENT:

| | | | | | | | |
|-----|----|----|----|----|----|----|----|
| Awg | 22 | 20 | 18 | 16 | 14 | 12 | 10 |
| Amp | 3 | 4 | 7 | 10 | 15 | 20 | 24 |

MAXIMUM ELECTRIC RATING: 221°F(150°C) 600V

TERMINAL MATERIAL: Electro-Tin Plated Brass

Dimensions = Inches

| Cat. No. | Wire Size AWG | NEMA TAB | W | F | L | B | T | Fig | Bag Qty | Master Bag Qty |
|----------|---------------|------------|------|------|------|------|------|-----|---------|----------------|
| 12412 | 22-16 | .020 X.187 | .197 | .244 | .445 | .217 | .016 | 1 | 100 | 1000 |
| 12414 | 22-16 | .032 X.187 | .197 | .244 | .445 | .217 | .016 | 1 | 100 | 1000 |
| 12416 | 22-16 | .032 X.250 | .260 | .299 | .551 | .291 | .016 | 1 | 100 | 1000 |
| 12418 | 22-16 | .032 X.250 | .260 | .307 | .591 | .366 | .018 | 2 | 100 | 1000 |
| 12420 | 16-14 | .020 X.187 | .197 | .244 | .457 | .217 | .016 | 1 | 100 | 1000 |
| 12422 | 16-14 | .032 X.187 | .197 | .244 | .457 | .217 | .016 | 1 | 100 | 1000 |
| 12424 | 16-14 | .032 X.250 | .260 | .299 | .551 | .291 | .016 | 1 | 100 | 1000 |
| 12426 | 16-14 | .032 X.250 | .260 | .307 | .591 | .366 | .018 | 2 | 100 | 1000 |
| 12428 | 12-10 | .032 X.250 | .260 | .299 | .571 | .295 | .018 | 3 | 100 | 1000 |

Nylon Insulated Flag Female Disconnects



Fig 1

Fig 2

Fig 3

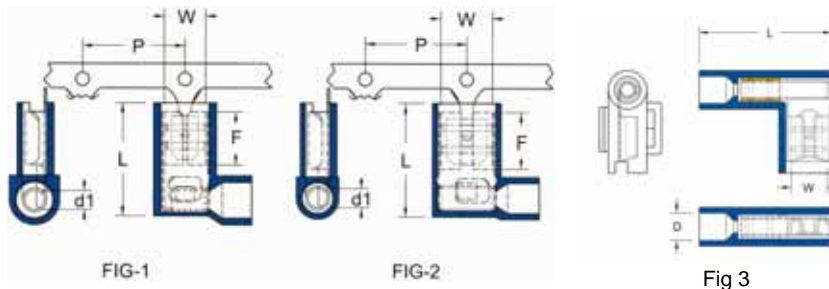


FIG-1

FIG-2

Fig 3

MAXIMUM ELECTRIC CURRENT:

| | | | | | |
|-----|----|----|----|----|----|
| Awg | 22 | 20 | 18 | 16 | 14 |
| Amp | 3 | 4 | 7 | 10 | 15 |

MAXIMUM ELECTRIC RATING: 221°F(105°C) 300 Volts

INSULATION MATERIAL: Nylon

TERMINAL MATERIAL: Electro-Tin Plated Brass

FEATURES: Serrated Barrel, Expanded Insulation

Dimensions = Inches

| Cat. No. | Color | Wire Size AWG | NEMA TAB | W | F | L | d1 | D | Fig. | Bag Qty | Master Bag Qty |
|----------|--------|---------------|------------|------|------|------|------|------|------|---------|----------------|
| 12432 | Red | 22-16 | .020 X.187 | .197 | .276 | .591 | .063 | - | 1 | 100 | 1000 |
| 12434 | Red | 22-16 | .032 X.187 | .197 | .276 | .591 | .063 | - | 1 | 100 | 1000 |
| 12436 | Red | 22-16 | .032 X.250 | .260 | .299 | .598 | .063 | - | 1 | 100 | 1000 |
| 12438 | Blue | 16-14 | .020 X.187 | .197 | .276 | .598 | .083 | - | 2 | 100 | 1000 |
| 12440 | Blue | 16-14 | .032 X.187 | .197 | .276 | .598 | .083 | - | 2 | 100 | 1000 |
| 12442 | Blue | 16-14 | .032 X.250 | .260 | .299 | .598 | .083 | - | 2 | 100 | 1000 |
| 12443 | Yellow | 12-10 | .032 X.250 | .260 | .295 | .906 | - | .248 | 3 | 100 | 1000 |