


Beam Clamps

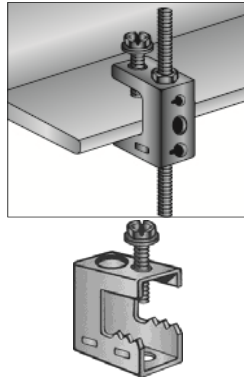


- ▶ Fast installation; fits beam flange up to 1/2"
- ▶ Used with 1/4" and 3/8" threaded rod, "S" hooks, conduit hangers, electrical box, & #10-24 or 1/4"-20 bridle rings
- ▶ Tapping 1/4"-20 bottom and back. Also #10-24 tapping on back

Static Load Limit: 100 lbs

Dimensions = Inches

Cat. No.	Accommodates		Box Qty
	Flange	Drop Rod	
18016	Up to 1/2" Thick	1/4-3/8	100

Spring Steel Beam Clamps

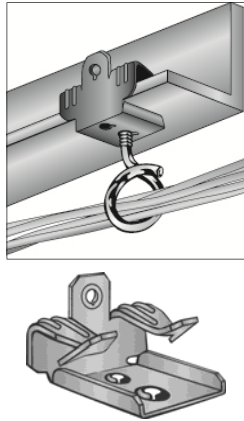

- ▶ Can be used to suspend boxes, fixtures and bridle rings to beam flanges 1/8" to 3/4"
- ▶ Beam clamp with 1/4"-20 x 3/8" staked stud used to suspend box from bottom of beam.
- ▶ Bottom & Back Tapped 1/4-20

Static Load Limit: 75 lbs to 100 lbs

Front Thread 75 lbs


Rear Thread 100 lbs

(static load limits cannot be combined)

Dimensions = Inches

Cat. No.	Flange Thickness	Box Qty
18012	1/8-1/4	100
18014	5/16-1/2	100

Spring Steel Beam Clamps - 1/4-20 X 3/8" Stud

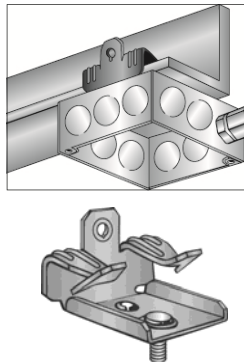


- ▶ Can be used to suspend boxes, fixtures and bridle rings to beam flanges 1/8" to 3/4"
- ▶ Beam clamp with 1/4"-20 x 3/8" staked stud used to suspend box from bottom of beam

Static Load Limit: 75 lbs

Dimensions = Inches

Cat. No.	Flange Thickness	Box Qty
18123	1/8-1/4	100
18124	5/16-1/2	100

Spring Steel Beam Clamps Universal

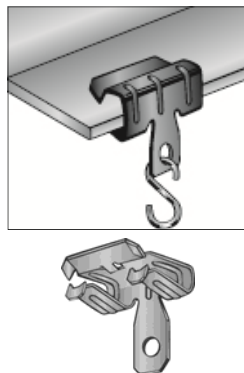

- ▶ Can be used on Bulb Tees & Beams
- ▶ Clearance for 1/4" Bolt in Tab

Static Load Limit: 200 lbs

Dimensions = Inches

Cat. No.	Flange Thickness	Box Qty
18018	1/8 to 1/4	100
18020	5/16 to 1/2	100
18152	9/16 to 3/4	100