



- ▶ 2-pole, 3-wire grounding
- ▶ 125V AC only
- ▶ 20A feed-through
- ▶ Response Time 1/40 of a second
- ▶ Response Threshold 4-6 ma Current Leakage
- ▶ LED Indicator Light
- ▶ Test/Reset Buttons
- ▶ Back & Side Wiring
- ▶ Green hex Head Ground Screw
- ▶ Impact Resistant ThermoPlastic Housing
- ▶ Wall Plate Included
- ▶ UL 94V-2 Flame Rating
- ▶ Meets or Exceeds UL 943 Class A & 498
- ▶ Complies with NEC 2008 406.11

Cat. No.	Color	Box Qty	Case Qty
<b>15 Amps (20 Amp Feed-Thru)</b>			
82331	White	1	50
82333	Lt Almond	1	50
82334	Black	1	50
<b>20 Amps (20 Amp Feed-Thru)</b>			
82342	Brown	1	50
82344	Black	1	50

U7


# Flush Dryer Receptacles



- ▶ Dryer Receptacle
- ▶ Single Gang
- ▶ 30 Amp
- ▶ 4 Wire
- ▶ 125/250 Volt

Cat. No.	Color	Box Qty	Case Qty
82521	White	10	200
82522	Black	10	200

# Flush Stove/Range Receptacle

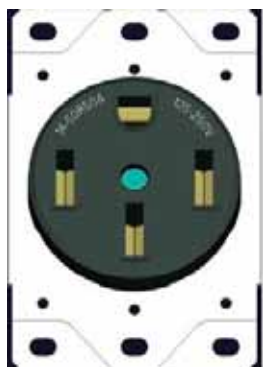

- ▶ Range Receptacle
- ▶ Single Gang
- ▶ 50 Amp
- ▶ 4 Wire
- ▶ 125/250 Volt

Cat. No.	Color	Box Qty	Case Qty
82526	Black	10	200