



**Catalog Number** 11112  
**UPC Number** 60198611112  
**Description** Non-Insulated Ring Terminals  
 4 AWG




**Features**

- Non-Insulated
- Manufactured from high strength copper alloy
- Electro-tin plated for corrosion resistance
- Brazed seam prevents splitting under maximum pressure
- Wire range stamped on the surface for easy interpretation

**General**

**Insulation Type** None  
**Material** Copper  
**Finish** Electro-tin plated  
**Color** N/A  
**Wire Range** 4 AWG  
**Stud Size** 3/8

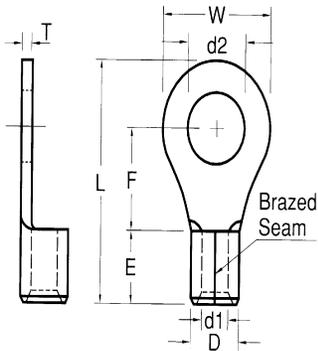

**Dimension Information**

**L Inches (mm)** 1.319  
**W Inches (mm)** 0.65  
**D Inches (mm)** 0.453  
**d1 Inches (mm)** 0.303  
**d2 Inches (mm)** 0.413  
**E Inches (mm)** 0.472  
**F Inches (mm)** 0.531  
**T Inches (mm)** 0.067

**Specifications**

**Temperature Rating** 150°C  
**Voltage Rating** 600 V  
**Flammability Rating** N/A  
**Amp Rating** 4 AWG 125 Amps

**Packaging**


**Bag Qty** 100  
**Master Bag Qty** 1000

**Certifications**

**UL** Yes  
**cUL** Yes  
**RoHS** Yes



REV	DESCRIPTION	DATE
△	RDK-97127	2008/07/09
△	RDK-98020	2009/09/18
△	RDC-99171	2010/04/27

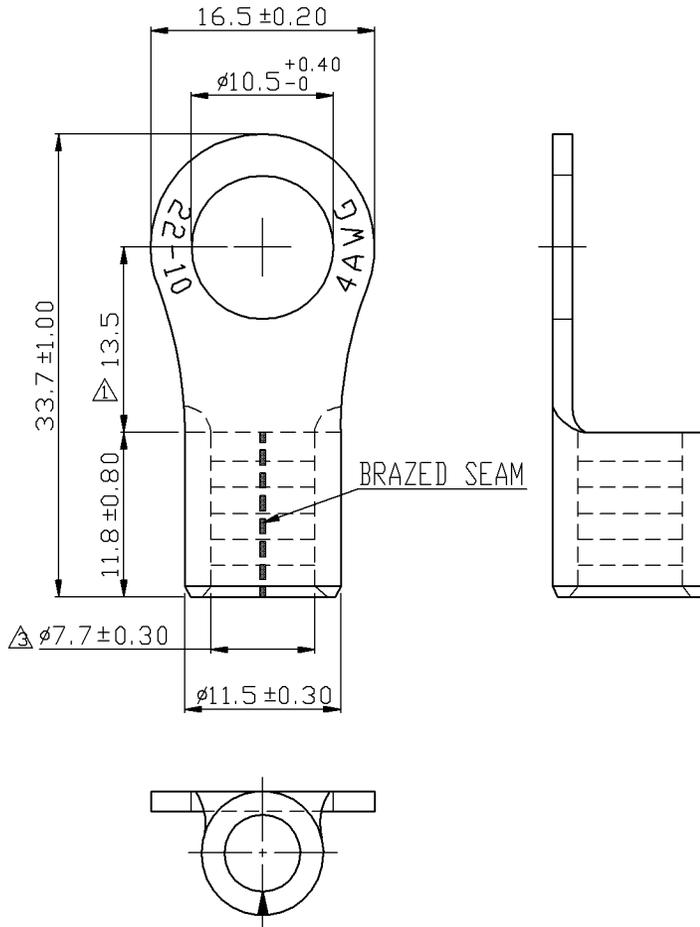

NOTE :

1. MAXIMUM ELECTRIC CURRENT : 

A.W.G.	4		
AMP.	125		
2. WIRE RANGE : 4 A.W.G. (  $22 \text{ mm}^2$  )
3. SURFACE TREATMENT : TIN PLATED
4. THICKNESS : 1.70 mm

Tolerance Unless Otherwise Specified	
0 >	mm ± ANGLE
>	mm ± 0° ° REF ±
>	mm ± ° ° ±
>	mm ± ° ° ±

NAME	NON-INSULATED RING TERMINALS			UNIT	mm	
PART NO.	11112	MATERIAL	COPPER	APPROVE		
NUMBER		SCALE	SHEET	PAGE	CHECKED	
DATE	2006/09/19	2/1	1-3	10F2	DRAWN	

Morris Products Inc.