



Catalog Number 11926
UPC Number 60198611926
Description Nylon Insulated Female Disconnect Connectors
12-10 AWG



Features


- Nylon Color Coded insulation for easy identification
- Manufactured from high strength copper alloy
- Electro-tin plated for corrosion resistance
- Expanded insulation eliminates strand “Hang Up”, provides strain relief & excellent UV, temperature and chemical resistance
- Wire range stamped on the surface for easy interpretation
- Brazed seams prevent splitting under maximum pressure
- Serrated barrel provides excellent electrical contact & pull-out force resistance

General

Insulation Type Nylon
Material Brass
Finish Electro-Tin Plated
Color Yellow
Wire Range 12-10
Tab Size .020 X .110

Dimension Information

Stock Thickness 0.016
L Inches (mm) 0.866
B Inches (mm) 0.512
C Inches (mm) 0.134
D Inches (mm) 0.256
F Inches (mm) 0.343
W Inches (mm) 0.126



Specifications

Temperature Rating 167°F (75°C)
Voltage Rating 300 V
Flammability Rating UL94V-O
Amp Rating 12 AWG 35 Amps
10 AWG 50 Amps

Packaging

Bag Qty 100
Master Bag Qty 1000

Certifications



UL Yes
cUL Yes
RoHS Yes

Morris Products 53 Carey Road, Queensbury, NY 12804

www.morrisproducts.com



REV	DESCRIPTION	DATE
-----	-------------	------

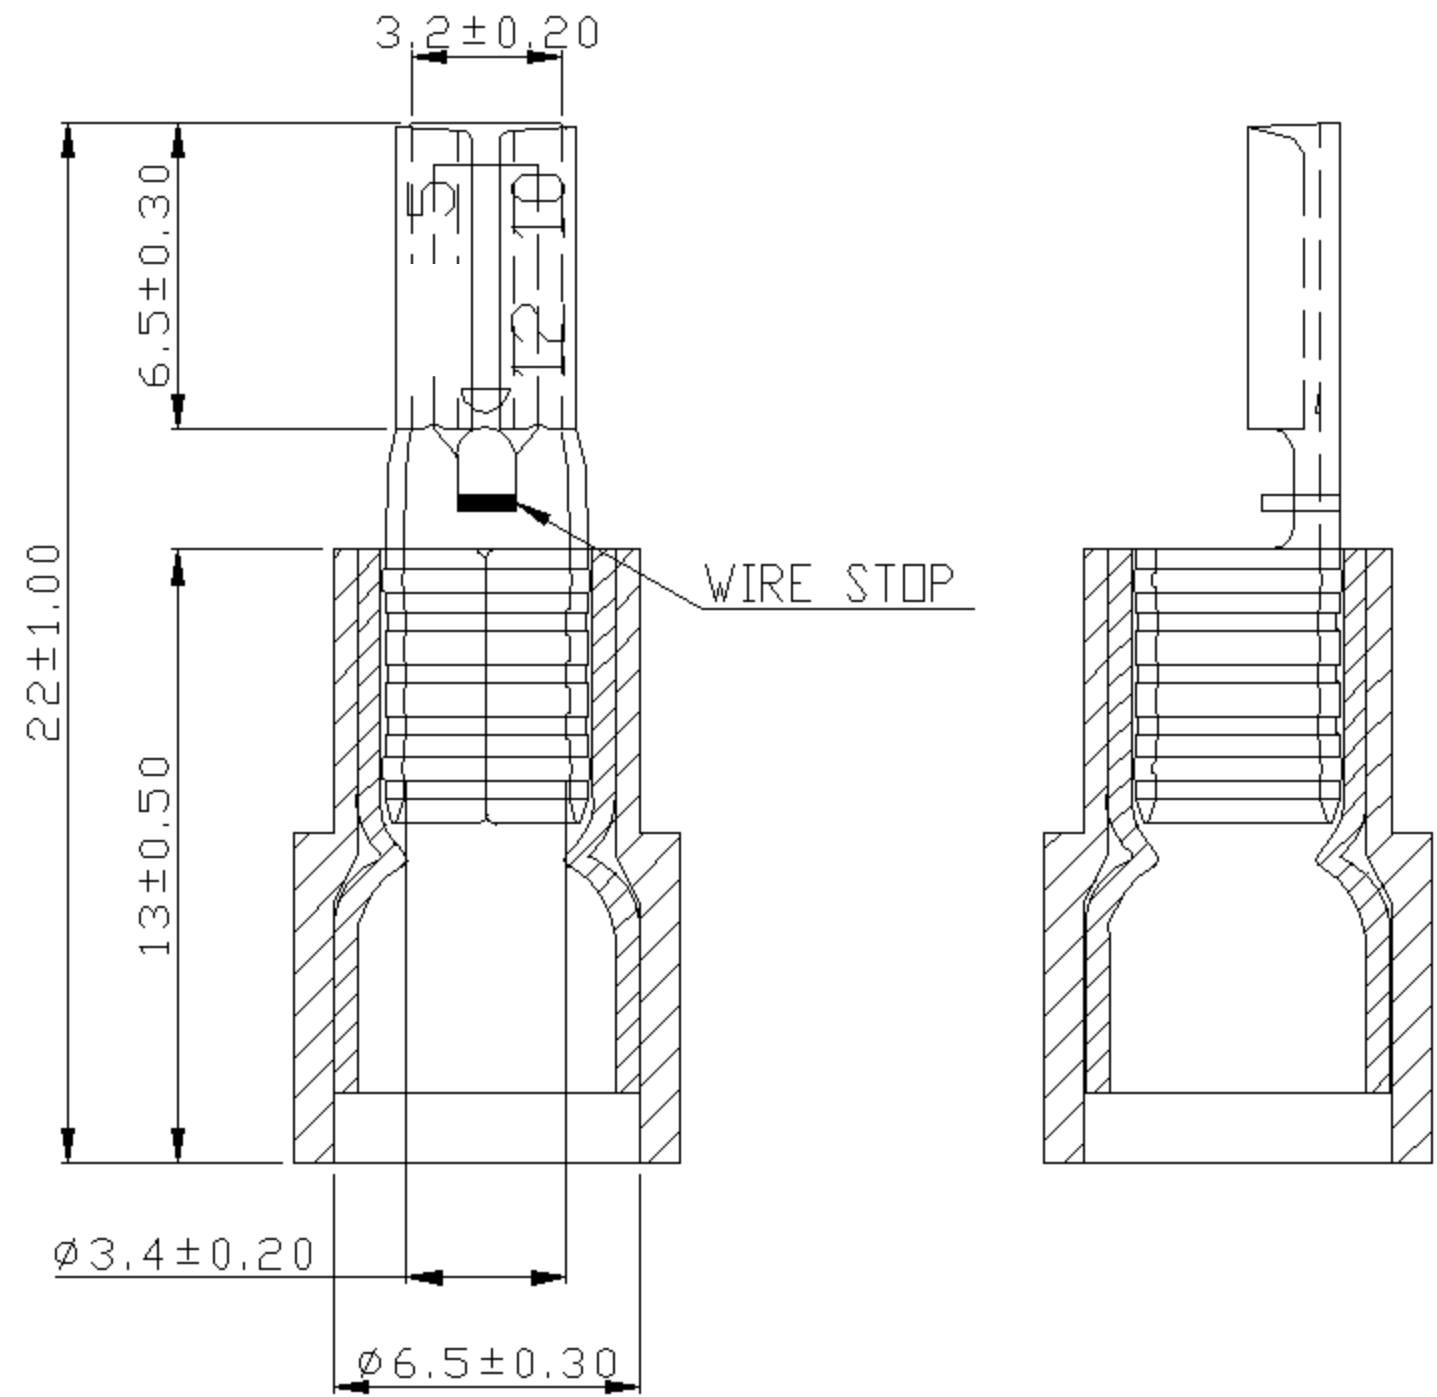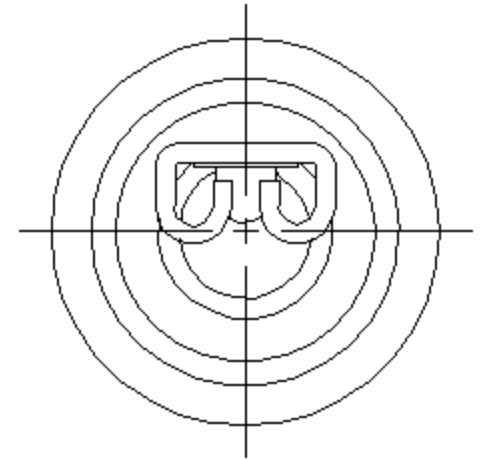

NOTE:

- MAXIMUM ELECTRIC CURRENT :

A.W.G.	12	10	
AMP.	20	24	
- MAXIMUM ELECTRICAL RATING : 105°C 600 VOLTS MAX.
- INSULATION MATERIAL : NYLON
- INSULATION COLOR : YELLOW
- TERMINAL MATERIAL : BRASS
- WIRE RANGE : 12-10 A.W.G.(4-6 mm²)
- TERMINAL SURFACE TREATMENT : TIN PLATED
- DOUBLE CRIMP : WITH COPPER SLEEVE ON BARREL
- NEMA TAB : 0.020 * 0.110 (0.5 * 2.8)
- TERMINAL THICKNESS : 0.35 mm

Tolerance Unless Otherwise Specified	
0 > 6 mm	± 0.20 ANGLE
6 > 18 mm	± 0.30 0° REF ±
18 > 30 mm	± 0.40 ±
30 > 75 mm	± 0.50 ±

NAME	NYLON-INSULATED DOUBLE CRIMP FEMALE DISCONNECTORS				UNIT	
PART NO.	11926	MATERIAL	-----	APPROVE		
NUMBER		SCALE	SHEET	PAGE	CHECKED	
DATE	2006/09/06	4/1	1-0	10F2	DRAWN	

Morris Products Inc.