



Catalog Number 12046
UPC Number 60198612046
Description Vinyl Insulated Bullet Disconnect
16-14
.197 OD




Features

- Vinyl Color Coded insulation for easy identification
- Manufactured from high strength copper alloy
- Electro-tin plated for corrosion resistance
- Expanded insulation eliminates strand “Hang Up”, provides strain relief & excellent UV, temperature and chemical resistance
- Wire range stamped on the surface for easy interpretation
- Butted seams prevent splitting under maximum pressure
- Serrated barrel provides excellent pull-out force resistance & electrical contact

General

Insulation Type Vinyl
Material Brass
Finish Electro-Tin Plated
Color Blue
Wire Range 16-14
Bullet Size 0.197



Dimension Information

T Inches 0.016
L Inches 0.827
B Inches 0.394
C Inches 0.091
D Inches 0.177
F Inches 0.335
W Inches 0.197

Specifications

Temperature Rating 167°F (75°C)
Voltage Rating 600 V
Flammability Rating UL94V-O
Amp Rating 14 AWG 15 Amps
16 AWG 10 Amps

Packaging




Bag Qty 100
Master Bag Qty 1000

Certifications

UL Yes
cUL Yes
RoHS Yes

Morris Products 53 Carey Road, Queensbury, NY 12804

www.morrisproducts.com

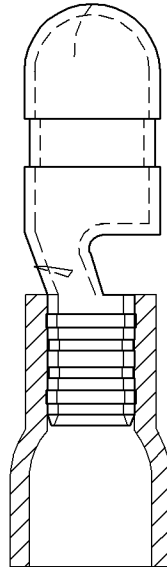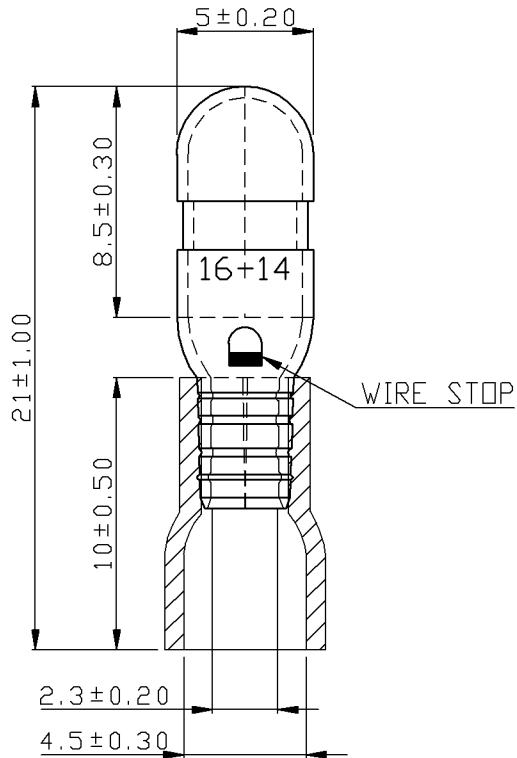

NOTE :

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	16	14	
AMP.	10	15	
2. MAXIMUM ELECTRICAL RATING : 75°C 600 VOLTS MAX.
3. INSULATION MATERIAL : VINYL
4. INSULATION COLOR : BLUE
5. TERMINAL MATERIAL : BRASS
6. WIRE RANGE : 16-14 A.W.G. (1.5-2.5 mm²)
7. TERMINAL SURFACE TREATMENT : TIN PLATED
8. TERMINAL THICKNESS : 0.40 mm

Tolerance Unless Otherwise Specified		
0 > 6 mm	± 0.20	ANGLE
6 > 18 mm	± 0.30	0° ° REF ±
18 > 30 mm	± 0.40	° ° ±
30 > 75 mm	± 0.50	° ° ±

NAME	VINYL-INSULATED BULLET DISCONNECTORS				UNIT	mm		
PART NO.	12046	MATERIAL	-----		APPROVE			
NUMBER		SCALE	SHEET	PAGE	CHECKED			
DATE	2006/06/12	4/1	1-1	1 OF 2	DRAWN			

Morris Products Inc.