



Catalog Number 12074
UPC Number 60198612074
Description Vinyl Insulated Female Receptacle
 Bullet Disconnect
 16-14 AWG
 .153 OD



Features


- Vinyl Color Coded insulation for easy identification
- Manufactured from high strength copper alloy
- Electro-tin plated for corrosion resistance
- Expanded insulation eliminates strand “Hang Up”, provides strain relief & excellent UV, temperature and chemical resistance
- Wire range stamped on the surface for easy interpretation
- Butted seams prevent splitting under maximum pressure
- Serrated barrel provides excellent pull-out force resistance & electrical contact

General

Insulation Type Vinyl
Material Brass
Finish Electro-Tin Plated
Color Blue
Wire Range 16-14
Bullet Size 0.157

Dimension Information

T Inches (mm) 0.016
L Inches (mm) 0.846
B Inches (mm) 0.394
C Inches (mm) 0.091
D Inches (mm) 0.197
F Inches (mm) 0.287
W Inches (mm) 0.153



Specifications

Temperature Rating 167°F (75°C)
Voltage Rating 600 V
Flammability Rating UL94V-O
Amp Rating 14 AWG 15 Amps
 16 AWG 10 Amps

Packaging

Bag Qty 100
Master Bag Qty 1000

Certifications


UL Yes
cUL Yes
RoHS Yes

Morris Products 53 Carey Road, Queensbury, NY 12804

www.morrisproducts.com



REV	DESCRIPTION	DATE
△ RDK-96131		2007/12/29

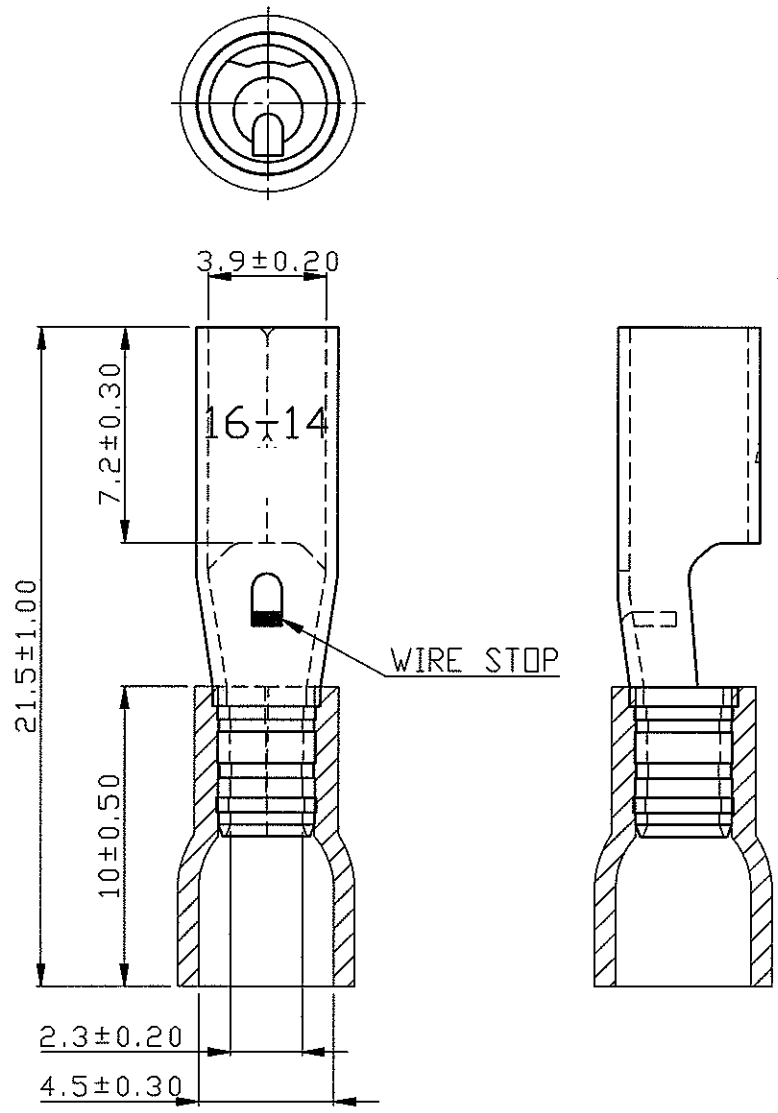

- NOTE :
1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	16	14	
AMP.	10	15	
 2. MAXIMUM ELECTRICAL RATING : 75°C 600 VOLTS MAX.
 3. INSULATION MATERIAL : VINYL △
 4. INSULATION COLOR : BLUE
 5. TERMINAL MATERIAL : BRASS
 6. WIRE RANGE : 16-14 A.W.G. (15-25 mm²)
 7. TERMINAL SURFACE TREATMENT : TIN PLATED
 8. TERMINAL THICKNESS : 0.40 mm

Tolerance Unless Otherwise Specified	
0 > 6 mm ± 0.20	ANGLE
6 > 18 mm ± 0.30	0° ° REF ±
18 > 30 mm ± 0.40	° ±
30 > 75 mm ± 0.50	° ±

NAME	VINYL-INSULATED RECEPTACLE DISCONNECTORS	UNIT	
PART NO.	12074	MATERIAL	-----
NUMBER		SCALE	SHEET PAGE
DATE	2006/06/12	4/1	1-1 10F2
			DRAWN

Morris Products Inc.