



Catalog Number 12078
UPC Number 60198612078
Description Vinyl Insulated Female Receptacle
 Bullet Disconnect
 12-10 AWG
 .193 OD




Features

- Vinyl Color Coded insulation for easy identification
- Manufactured from high strength copper alloy
- Electro-tin plated for corrosion resistance
- Expanded insulation eliminates strand “Hang Up”, provides strain relief & excellent UV, temperature and chemical resistance
- Wire range stamped on the surface for easy interpretation
- Butted seams prevent splitting under maximum pressure
- Serrated barrel provides excellent pull-out force resistance & electrical contact

General

Insulation Type Vinyl
 Material Brass
 Finish Electro-Tin Plated
 Color Yellow
 Wire Range 12-10
 Bullet Size 0.197



Dimension Information

T Inches (mm) 0.018
 L Inches (mm) 0.965
 B Inches (mm) 0.512
 C Inches (mm) 0.134
 D Inches (mm) 0.217
 F Inches (mm) 0.276
 W Inches (mm) 0.193

Specifications

Temperature Rating 167°F (75°C)
 Voltage Rating 600 V
 Flammability Rating UL94V-O
 Amp Rating 12 AWG 20 Amps
 10 AWG 24 Amps

Packaging

Bag Qty 100
 Master Bag Qty 1000

Certifications


UL Yes
 cUL Yes
 RoHS Yes

Morris Products 53 Carey Road, Queensbury, NY 12804

www.morrisproducts.com



REV	DESCRIPTION	DATE
△ RDK-96131		2007/12/29

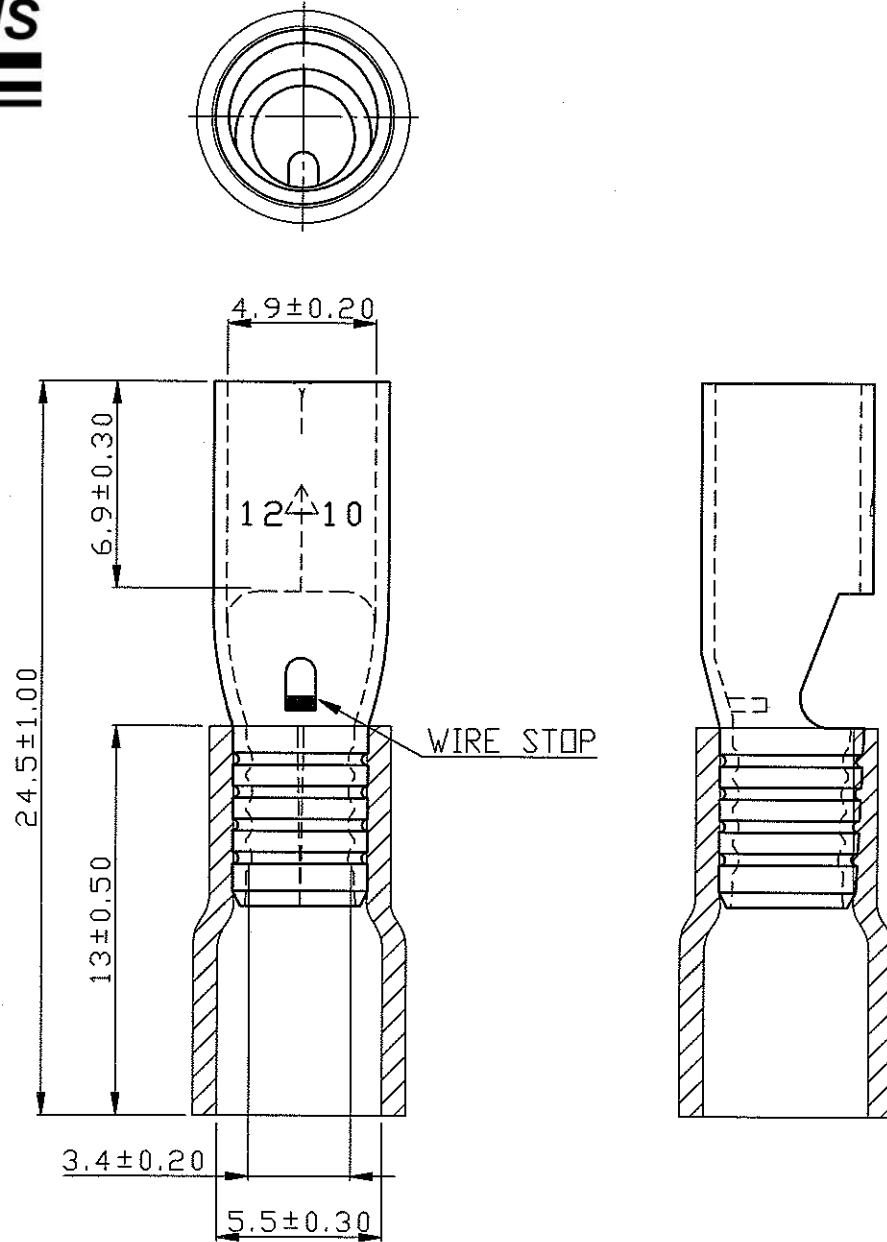

- NOTE :
1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	12	10	
AMP.	20	24	
 2. MAXIMUM ELECTRICAL RATING : 75°C 600 VOLTS MAX. △
 3. INSULATION MATERIAL : VINYL △
 4. INSULATION COLOR : YELLOW
 5. TERMINAL MATERIAL : BRASS
 6. WIRE RANGE : 12-10 A.W.G. (4 - 6 mm²)
 7. TERMINAL SURFACE TREATMENT : TIN PLATED
 8. TERMINAL THICKNESS : 0.45 mm

Tolerance Unless Otherwise Specified	
0 > 6 mm ± 0.20	ANGLE
6 > 18 mm ± 0.30	° REF ±
18 > 30 mm ± 0.40	° ±
30 > 75 mm ± 0.50	° ±

NAME	VINYL-INSULATED RECEPTACLE DISCONNECTORS	UNIT	
PART NO.	12078	MATERIAL	-----
NUMBER		SCALE	SHEET PAGE CHECKED
DATE	2006/06/12	4/1	1-1 10F2 DRAWN

Morris Products Inc.