



Catalog Number 12084
UPC Number 60198612084
Description Nylon Insulated Female Receptacle
Bullet Disconnect
16-14 AWG .153 OD



Features


- Nylon Color Coded insulation for easy identification
- Manufactured from high strength copper alloy
- Electro-tin plated for corrosion resistance
- Expanded insulation eliminates strand “Hang Up”, provides strain relief & excellent UV, temperature and chemical resistance
- Wire range stamped on the surface for easy interpretation
- Brazed seams prevent splitting under maximum pressure
- Serrated barrel & extended copper crimp sleeve provides excellent electrical contact & pull-out force resistance

General

Insulation Type Nylon
Material Brass/Copper
Finish Electro-Tin Plated
Color Blue
Wire Range 16-14
Bullet Size 0.157

Dimension Information

T Inches (mm) 0.016
L Inches (mm) 0.886
B Inches (mm) 0.433
C Inches (mm) 0.091
D Inches (mm) 0.197
F Inches (mm) 0.287
W Inches (mm) 0.153



Specifications

Temperature Rating 105°C
Voltage Rating 600 V
Flammability Rating UL94V-O
Amp Rating 14 AWG 15 Amps
16 AWG 10 Amps

Packaging



Bag Qty 100
Master Bag Qty 1000

Certifications

UL Yes
cUL Yes
RoHS Yes

Morris Products 53 Carey Road, Queensbury, NY 12804

www.morrisproducts.com

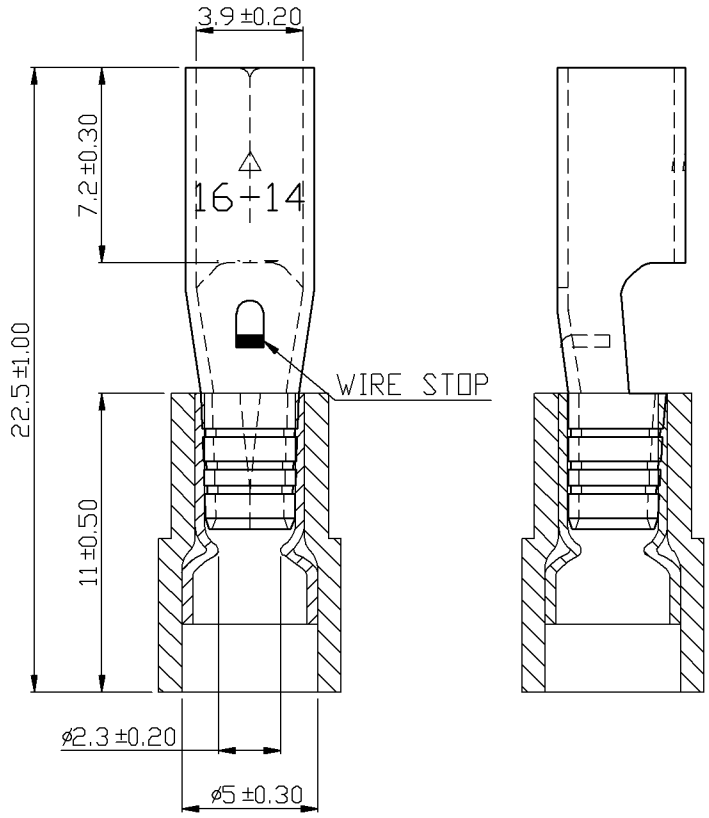

- NOTE :
1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	16	14
AMP.	10	15
 2. MAXIMUM ELECTRICAL RATING : 105°C 600 VOLTS MAX.
 3. INSULATION MATERIAL : NYLON
 4. INSULATION COLOR : BLUE
 5. TERMINAL MATERIAL : BRASS
 6. WIRE RANGE : 16-14 A.W.G. (< 1.5-2.5 mm²)
 7. DOUBLE CRIMP : WITH COPPER SLEEVE ON BARREL
 8. TERMINAL SURFACE TREATMENT : TIN PLATED
 9. TERMINAL THICKNESS : 0.40 mm

Tolerance Unless Otherwise Specified	
0 > 6 mm ± 0.20	ANGLE
6 > 18 mm ± 0.30	0° > ° REF ±
18 > 30 mm ± 0.40	° > ° ±
30 > 75 mm ± 0.50	° > ° ±

NAME	NYLON-INSULATED DOUBLE CRIMP RECEPTACLE DISCONNECTORS				UNIT	mm	
PART NO.	12084	MATERIAL	-----	APPROVE			
NUMBER		SCALE	SHEET	PAGE	CHECKED		
DATE	2009/10/23	4/1	1-0	10F2	DRAWN		

Morris Products Inc.