



Catalog Number 12104
UPC Number 60198612104
Description Non-Insulated Butt Splice Connector
22-16 AWG



Features

- Manufactured from high strength tubular copper alloy
- Electro-tin plated for corrosion resistance
- Wire range stamped on the surface for easy interpretation
- Funneled barrel provides excellent contact & mechanical pull-out force resistance

General

Insulation Type N/A
Material Copper Tubular
Finish Electro-Tin Plated
Color N/A
Wire Range 22-16
Stud Size N/A

Dimension Information

L Inches (mm) 0.591
D Inches (mm) 0.13
D1 Inches (mm) 0.067
T Inches (mm) 0.031

Specifications


Temperature Rating 150°C
Voltage Rating 600 V
Flammability Rating N/A
Amp Rating 22 AWG 9 Amps
20 AWG 12 Amps
18 AWG 17 Amps
16 AWG 18 Amps

Packaging

Bag Qty 100
Master Bag Qty 1000

Certifications

UL Yes
cUL Yes
RoHS Yes




BUTT

Morris Products 53 Carey Road, Queensbury, NY 12804

www.morrisproducts.com



REV	DESCRIPTION	DATE
-----	-------------	------

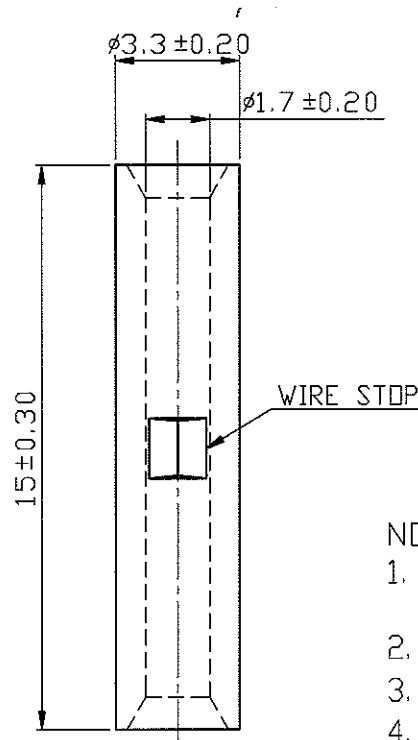

NOTE :

- MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18	16
AMP.	9	12	17	18
- WIRE RANGE : 22-16 A.W.G. (0.5-1.5 mm²)
- SURFACE TREATMENT : TIN PLATED
- THICKNESS : 0.80 mm



Tolerance Unless Otherwise Specified	
0 > 6 mm ± 0.20	ANGLE
6 > 18 mm ± 0.30	° REF ±
18 > 30 mm ± 0.40	° ±
30 > 75 mm ± 0.50	° ±

NAME	NON-INSULATED BUTT CONNECTORS				UNIT	
PART NO.	12104	MATERIAL	COPPER TUBULAR	APPROVE		
NUMBER	KT-92031-C	SCALE	SHEET	PAGE	CHECKED	
DATE	2006/03/17	5/1	1-0	10F1	DRAWN	

Morris Products Inc.