




**MORRIS CAT#: 12148B**  
**Nylon Insulated Butt Splice Connectors**  
**12-10 Bulk Bag**

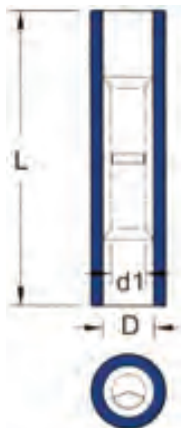

**Features:**

Nylon Insulated Butt Splice Connectors 12-10 Awg features include:

- Nylon Insulated Butt Splice Connector Material: High Strength Electrolytic Tubular Copper
- Electro-Tin Plated for corrosion resistance
- Nylon Insulated Butt Splice Connector has Center Wire Stop Barrier
- Color Coded Insulation for easy identification
- Easy Entry Expanded Insulation eliminates strand "Hang Up", increasing crimping rates and provides mechanical strain relief
- Maximum Electric Current: 26 AWG - 5.5 Amp, 24 AWG - 7 Amp, 22 AWG - 9 Amp, 20 AWG - 12 Amp, 18 AWG - 17 Amp, 16 AWG - 18 Amp, 14 AWG - 30 Amp, 12 AWG - 35 Amp, 10 AWG - 50 Amp
- 221°F(105°C) 600 Volts Max
- cULus Listed
- Dimension Measurements = Inches
- Order Qty of 500 = 1 Bag of 500

**MAXIMUM ELECTRIC CURRENT:**

AWG	26	24	22	20	18	16	14	12	10
AMP	5.5	7	9	12	17	18	30	35	50

**MAXIMUM ELECTRIC RATING:** 221°F (105°C) 600 Volts

**CONNECTOR MATERIAL:** Copper

**INSULATION MATERIAL:** Nylon

**FEATURES:** Expanded Insulation

DIMENSIONS = INCHES

CAT. NO.	COLOR	WIRE SIZE AWG	L	D	DI	MATERIAL	BAG QTY	MASTER BAG QTY
12148B	YELLOW	12-10	1.075	.209	.134	COPPER PLATE	500	5,000