



Catalog Number	12324
UPC Number	60198612324
Description	Heat Shrinkable Fully Insulated Female Receptacle Bullet Disconnect 16-14 AWG .157 OD



Features


Color Coded HD Polyethylene Heat Shrink insulation
Manufactured from high strength copper alloy
Electro-tin plated for corrosion resistance
Expanded Insulation funnel entry eliminates strand "Hang Up", increases the crimping rates and the reliability of the termination
Wire range stamped on the surface for easy interpretation
Brazed seam prevent splitting under maximum pressure
Serrated barrel & extended copper crimp sleeve provide excellent electrical contact, pull-out resistance & mechanical stress relief

General

Insulation Type	High Density Polyethylene Heat Shrink
Material	Copper
Finish	Electro-tin plated
Color	Blue
Wire Range	16-14 AWG
Bullet OD	.157

Dimension Information

L Inches (mm)	1.594
W Inches (mm)	0.154
D Inches (mm)	0.295



Specifications

Temperature Rating	105°C
Voltage Rating	300 V
Flammability Rating	UL94V-O
Amp Rating	14 AWG 15 Amps 16 AWG 10 Amps

Packaging



Bag Qty	100
Master Bag Qty	1000

Certifications

UL	Yes
cUL	Yes
RoHS	Yes

Morris Products 53 Carey Road, Queensbury, NY 12804

www.morrisproducts.com

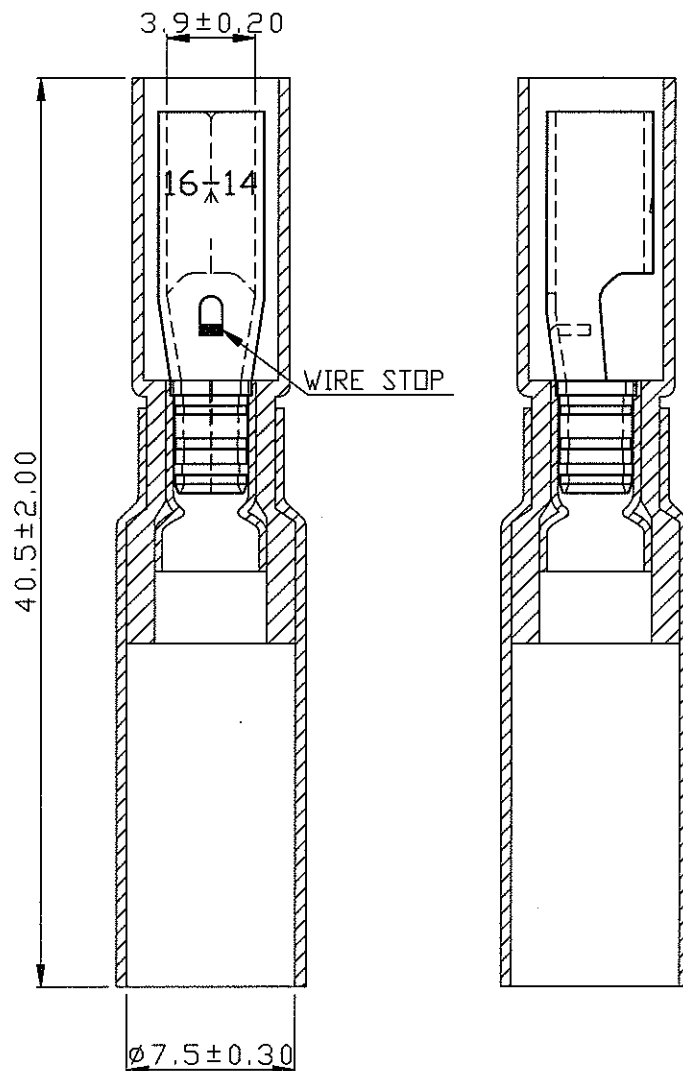

REV	DESCRIPTION	DATE
Δ	RDK-97140	2008/07/11

NOTE :

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	16	14
AMP.	10	15
2. MAXIMUM ELECTRICAL RATING : 300 VOLTS MAX.
3. SHRINK TEMP. : 150°C Δ
4. OPERATING TEMP. : -40°C~+105°C
5. INSULATION MATERIAL : HIGH DENSITY PE.
6. INSULATION MATERIAL : WITH COPPER SLEEVE ON BARREL
7. INSULATEDN COLOR : BLUE
8. WIRE RANGE : 16-14 A.W.G. (1.5 - 2.5 mm²)
9. TERMINAL MATERIAL : BRASS
10. TERMINAL SURFACE TREATMENT : TIN PLATED
11. TERMINAL THICKNESS : 0.40 mm

Tolerance Unless Otherwise Specified		
0 > 6 mm ±0.20	ANGLE	
6 > 18 mm ±0.30	0°	° REF ±
18 > 30 mm ±0.40	°	±
30 > 75 mm ±0.50	°	±

NAME	HEAT SHRINKABLE-FULLY RECEPTACLE DISCONNECTORS 'HD'(DOUBLE CRIMP TYPE)				UNIT	
PART NO.	12324	MATERIAL	-----	APPROVE		
NUMBER		SCALE	SHEET	PAGE	CHECKED	
DATE	2005/12/30	2/1	1-1	10F2	DRAWN	

Morris Products Inc.