




**MORRIS CAT#: 12340-12343**  
**Heat Shrinkable Nylon Reducing Butt Splice**  
**Connectors**

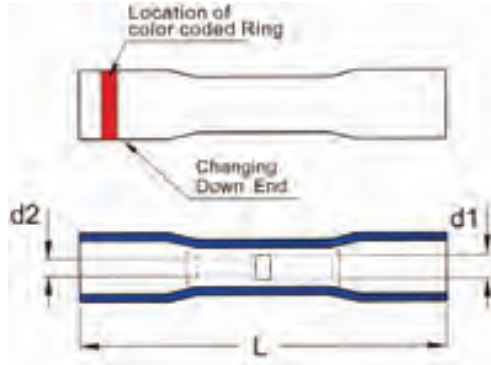

**Features:**

Heat Shrinkable Nylon Reducing Butt Splice Connectors features include:

- Heat Shrinkable Nylon Reducing Butt Splice Connectors features Step-Down Barrel that allows for transition from larger to smaller conductor with simple In-Line Splice
- Heat Shrinkable Nylon Reducing Butt Splice Connectors Material: High Strength Brass
- Electro-Tin Plated for corrosion resistance
- Heat Shrinkable Nylon Reducing Butt Splice Connectors has Center Wire Stop Barrier
- Insulation: Nylon with PE Heat Shrink
- Max Current: 26 AWG - 5.5 Amp, 24 AWG - 7 Amp, 22 AWG - 9 Amp, 20 AWG - 12 Amp, 18 AWG - 17 Amp, 16 AWG - 18 Amp, 14 AWG - 30 Amp, 12 AWG - 35 Amp, 10 AWG - 50 Amp, 8 AWG - 70 Amp, 6 AWG - 95 Amp, 4 AWG - 125 Amp
- 302°F(150°C) 600 Volts Max
- cULus Listed
- Dimension Measurements = Inches
- Order Qty of 100 = 1 Bag of 100

**MAXIMUM ELECTRIC CURRENT:**

AWG	22	20	18	16	14	12	10
AMP	9	12	17	18	30	35	50

**MAXIMUM ELECTRIC RATING:** 600 Volts

**SHRINK TEMP:** 302°F (150°C)

**INSULATION MATERIAL:** Nylon w/ High Density PE Heat Shrink

**TERMINAL MATERIAL:** Brass

DIMENSIONS = INCHES

CAT. NO.	WIRE RANGE AWG	COLOR CODE	L	D1	D2	BAG QTY	MASTER BAG QTY
12340	16-14 TO 22-16	BLUE WITH RED RING	1.417	.091	.087	100	1,000
12341	12-10 TO 16-14	YELLOW WITH BLUE RING	1.614	.134	.091	100	1,000
12342	8 TO 16-14	RED WITH BLUE RING	1.909	.181	.091	100	1,000
12343	8 TO 12-10	RED WITH YELLOW RING	1.909	.181	.138	100	1,000