



Catalog Number 12418
UPC Number 60198612418
Description Non Insulated
Right Angle Flag Female Disconnect
22-18 AWG

Features

- Manufactured from high strength copper alloy
- Electro-tin plated for corrosion resistance
- Wire range stamped on the surface for easy interpretation
- Brazed seam prevents splitting under maximum pressure
- Serrated barrel provides excellent electrical contact & pull-out force resistance




General

Insulation Type N/A
Material Brass
Finish Electro-Tin Plated
Color N/A
Wire Range 22-18
Tab Size .032 X .250

Dimension Information

Stock Thickness 0.018
L Inches (mm) 0.591
B Inches (mm) 0.366
F Inches (mm) 0.307
W Inches (mm) 0.26



Specifications

Temperature Rating 150°C
Voltage Rating 300 V
Flammability Rating N/A
Amp Rating 22 AWG 3 Amps
20 AWG 4 Amps
18 AWG 7 Amps

Packaging

Bag Qty 100
Master Bag Qty 1000

Certifications

UL Yes
cUL Yes
RoHS Yes

Morris Products 53 Carey Road, Queensbury, NY 12804




www.morrisproducts.com



REV

DESCRIPTION

DATE

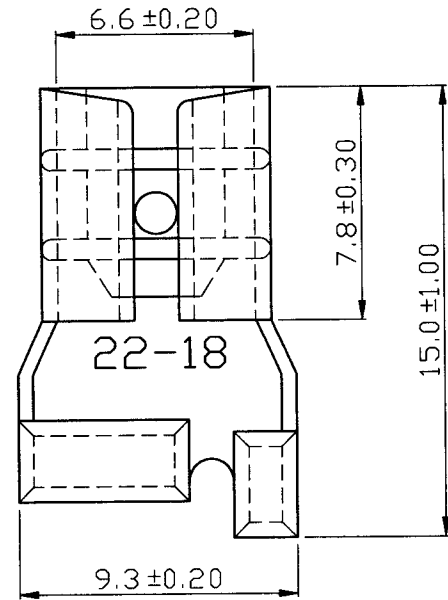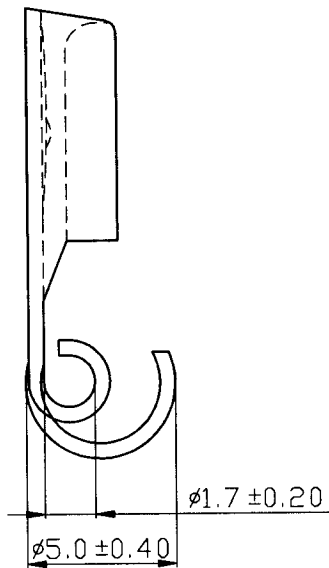

NOTE :

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18
AMP.	3	4	7
2. WIRE RANGE : 22-18 A.W.G. (0.5-0.75 mm²)
3. SURFACE TREATMENT : TIN PLATED
4. NEMA TAB : 0.032 * 0.250 (0.8 * 6.35)
5. THICKNESS : 0.45 mm

Tolerance Unless Otherwise Specified	
0 > 6 mm ± 0.20	ANGLE
6 > 18 mm ± 0.30	0° REF ±
18 > 30 mm ± 0.40	±
30 > 75 mm ± 0.50	±

NAME	NON-INSULATED FLAG FEMALE DISCONNECTORS(NORMAL TYPE)				UNIT	
PART NO.	12418	MATERIAL	BRASS	APPROVE		
NUMBER		SCALE	SHEET	PAGE	CHECKED	
DATE	2006/11/11	4/1	1-0	10F2	DRAWN	

Morris Products Inc.