




**Catalog Number** See Table  
**UPC Number**  
**Description** Cable Tie - Natural  
 50 Lb Tensile Strength



**Features**

- Durable Nylon 6/6 Material
- Low Profile Locking Head
- Bent Tip for ease of insertion into locking head

**General**

**Material:** Nylon 6/6  
**Flammability:** UL94V-2

**Dimension Information**

**Length:** See Table  
**Width:** See Table  
**Bundle Dia:** See Table

**Specifications**

**Temperature Rating** Negative 40 to 185<sup>0</sup> F  
**Voltage Rating** 600  
**Flammability Rating** UL 94V-2  
**Tensile Strength:** 50 Lbs

**Packaging**

**Bag Qty** 100


**Certifications**

**UL** Yes  
**CSA** Yes  
**ROHS** Yes

Cat. No.	Tensil Strength (Lbs.)	Length (Inches)	Width (Inches)	Max Bundle Dia (Inches)	Bag Qty	Master Bag Qty	Per 100
20052	50	7	0.156	1.93	100	1000	
20054	50	8	0.179	2.17	100	1000	
20056	50	11	0.187	3.19	100	1000	
20058	50	14 1/2	0.187	4.02	100	1000	
20060	50	17	0.187	4.92	100	100	



[www.morrisproducts.com](http://www.morrisproducts.com)

Morris Products 53 Carey Road, Queensbury, NY 12804



1     •     2     •     3     •     4     •

A  
B  
C  
D  
E  
F

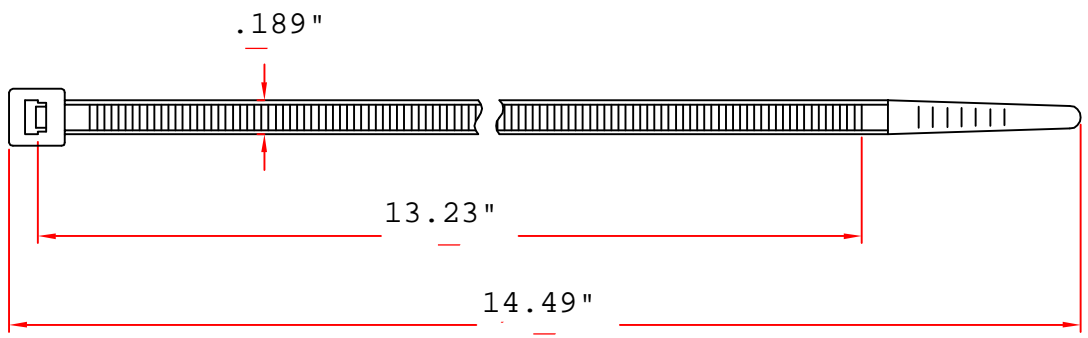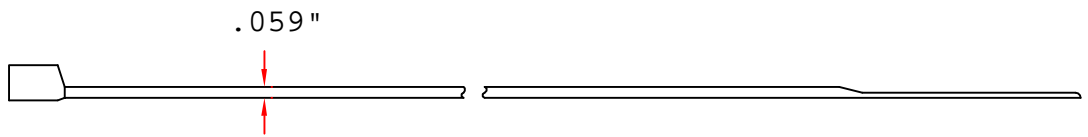

Morris Products  
Queensbury NY

MATERIAL UL 94V-2  
NYLON 66

ITEM NO. 20058

SCALE

50 LBS  
Tensile

NAME  
NYLON CABLE TIE



( . . )



03-22-2007  
DATE

REVISIONS K001

R.NO.