




70601B - GENERAL PURPOSE RETROFIT LAMP





25W/36W 5000K 120-277V

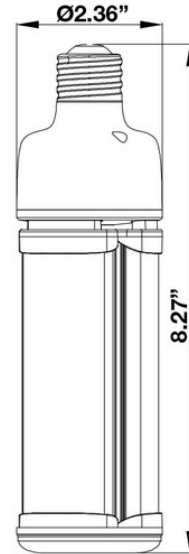

FEATURES:

- Wattage Selectable: 25W/36W
- Retrofit for HPS & MH Lamps, E26 Base
- Polycarbonate Housing
- Polycarbonate Diffused Lens
- Operating Temperature: -40°F to 113°F
- IP64 Wet Location Rated
- UL Listed
- UL approved for enclosed fixtures
- 5 year Warranty

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Light Pattern	BUG Rating	Lumens/Watt
70601B	White	25W/36W	4,450	5000K	120-277	268°	B2-U4-G2	123 lm/w

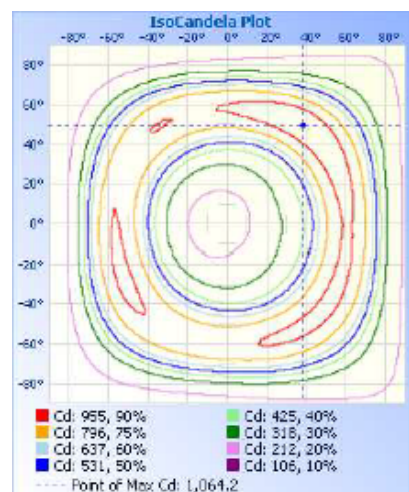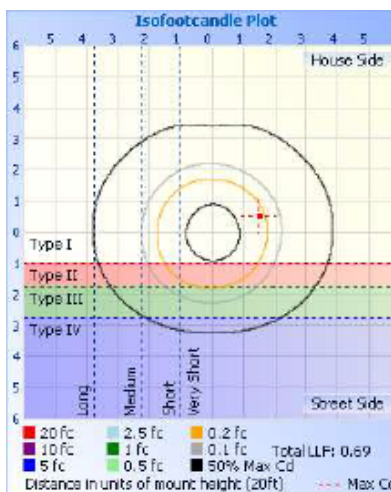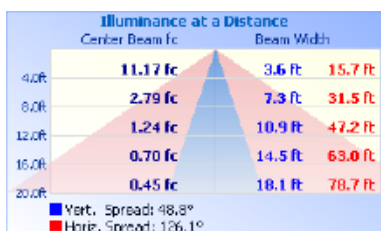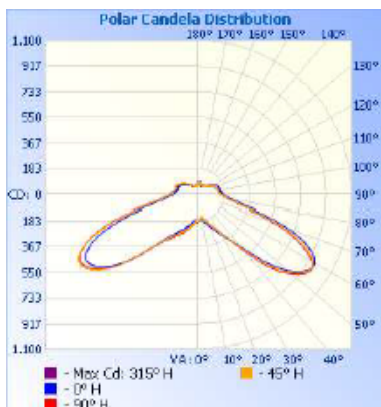

PHOTOMETRY



70601B - GENERAL PURPOSE RETROFIT LAMP

25W/36W 5000K 120-277V

Technical Specifications:

Electrical:

Input Voltage: 120 - 277

Current: .31A @ 120V

Frequency: 60Hz

Power Factor: $\geq .87$

THD: 23%

Product Parameters:

25W/36W

Efficacy: 123 lumens per watt

50,000+ LED Life Span

CCT: 5000K (Cool White)

Chromaticity Measurements:

Beam Angle: 268°

BUG Rating: B2-U4-G2

CRI: >80

R9: 12

Dimming:

Yes

Operating Temperature:

Minimum Starting -40°F - 113°F

Construction:

Housing: Polycarbonate

IP Rating: IP64 Wet Location Rated

Lens Material: Polycarbonate

Mounting: E26 Screw In Base

Listings: UL

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).