




70618B - GENERAL PURPOSE RETROFIT LAMP





32W/45W 5000K 120-277V

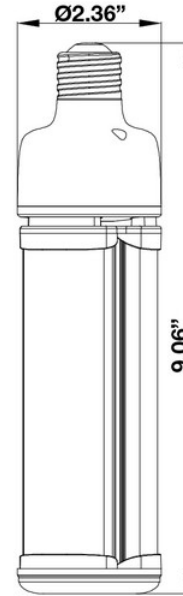

FEATURES:

- Wattage Selectable: 32W/45W
- Retrofit for HPS & MH Lamps, E26 Base
- Polycarbonate Housing
- Polycarbonate Diffused Lens
- Operating Temperature: -40°F to 113°F
- IP64 Wet Location Rated
- UL Listed
- UL approved for enclosed fixtures
- 5 year Warranty

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Light Pattern	BUG Rating	Lumens/Watt
70618B	White	32W/45W	5,153	5000K	120-277	264°	B2-U4-G2	114 lm/w

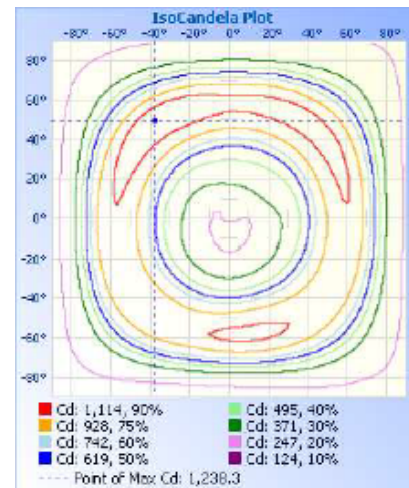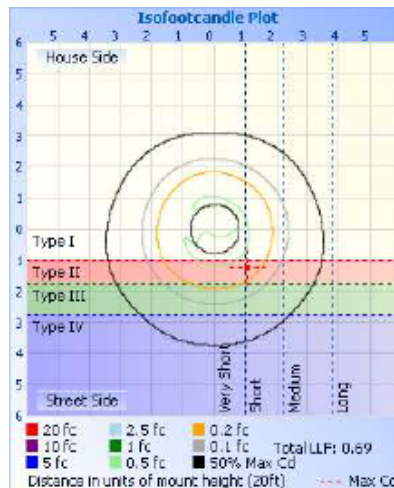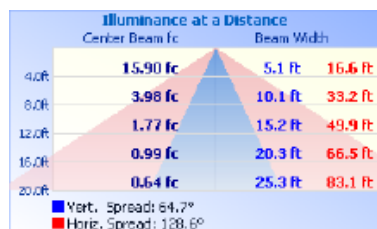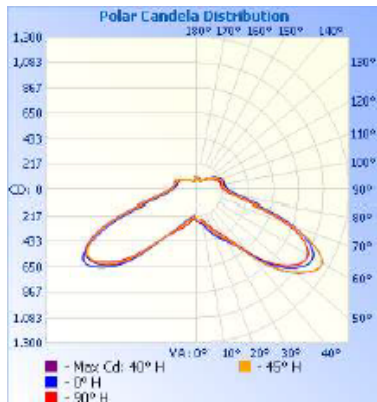

PHOTOMETRY



70618B - GENERAL PURPOSE RETROFIT LAMP

32W/45W 5000K 120-277V

Technical Specifications:

Electrical:

Input Voltage: 120 - 277

Current: .40A @ 120V

Frequency: 60Hz

Power Factor: ≥ 0.87

THD: 23%

Product Parameters:

Watts: 32W/45W

Efficacy: 114 lumens per watt

50,000+ LED Life Span

CCT: 5000K (Cool White)

Chromaticity Measurements:

Beam Angle: 264°

BUG Rating: B2-U4-G2

CRI: >80

R9: 4

Dimming:

Yes

Operating Temperature:

Minimum Starting -40°F - 113°F

Construction:

Housing: Polycarbonate

IP Rating: IP64 Wet Location Rated

Lens Material: Polycarbonate

Mounting: E26 Screw In Base

Listings: UL Listed

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).