




# 70620B - GENERAL PURPOSE RETROFIT LAMP

42W/60W 5000K 120-277V




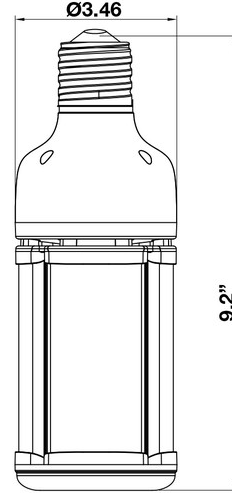


## FEATURES:

- Wattage selectable: 42W/60W
- Retrofit for HPS & MH Lamps
- E39 Base
- Polycarbonate Housing, Polycarbonate Diffused Lens
- Operating Temperature: -40°F to 113°F
- IP64 Wet Location Rated
- DLC, UL Listed
- UL approved for enclosed fixtures
- 5 year Warranty

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Light Pattern	BUG Rating	Lumens/Watt	DLC Product ID#
70620B	White	42/60W	7,000	5000K	120-277	268°	B2-U4-G2	123 lm/w	S-I75203

## PHOTOMETRY

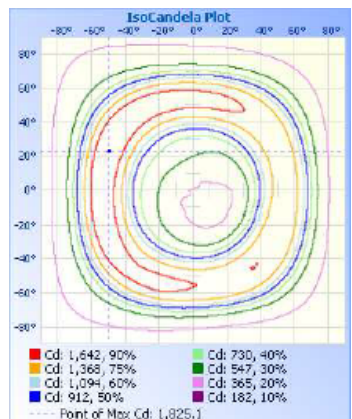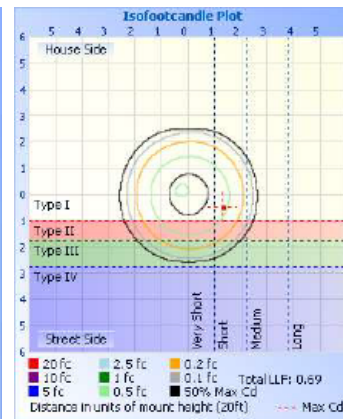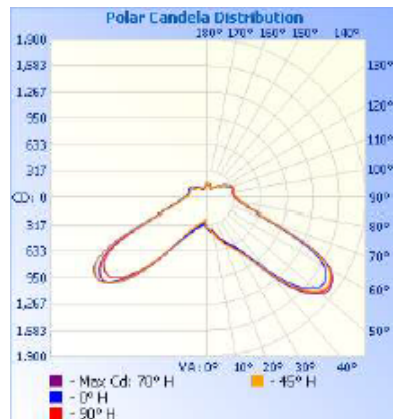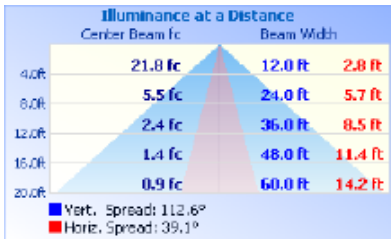



# 70620B - GENERAL PURPOSE RETROFIT LAMP

42W/60W 5000K 120-277V

## Technical Specifications:

### **Electrical:**

Input Voltage: 120 - 277

Current: .31A @ 120V

Frequency: 60Hz

Power Factor:  $\geq$ .87

THD: 23%

### **Product Parameters:**

42W/60W

Efficacy: 123 lumens per watt

50,000+ LED Life Span

CCT: 5000K (Cool White)

### **Chromaticity Measurements:**

Beam Angle: 268°

BUG Rating: B2-U4-G2

CRI: >80

R9: 12

### **Dimming:**

Yes

### **Operating Temperature:**

Minimum Starting -40°F - 113°F

### **Construction:**

Housing: Polycarbonate

IP Rating: IP64 Wet Location Rated

Lens Material: Polycarbonate

Mounting: E39 Screw In Base

Listings: DLC, UL Listed

### **Warranty:**

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).