



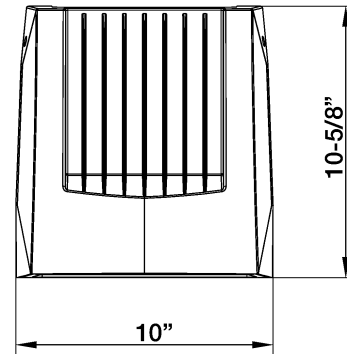

# MORRIS #: 71157A

## DOB Slim-Line Wall Pack

### 120-277V 70W 5000K White




#### Features:

- Hinged Bracket - 0-90° Angle Tilt Adjustment
- LumiLED LUXEON 3030 LEDs
- Integral Cooling Fin releases the heat efficiently to maintain the life of LEDs & LED driver
- Corrosion resistant Die Cast
- Aluminum housing
- Clear Tempered Glass Lens
- Superior Architectural Powder Coat finish
- Bronze Housing
- Environment: IP65 Wet Location Rated
- DLC PRODUCT ID#: PNE79DB2
- 5 Year Warranty

Part#	Wattage	Voltage	Lumens	CCT	CRI	Dimming	Light Pattern	Lumens/Watt	DLC PRODUCT ID#:
71157A	70W	120-277V	9,222	5000K	>70	N/A	102°	132	PNE79DB2

#### PHOTOMETRY

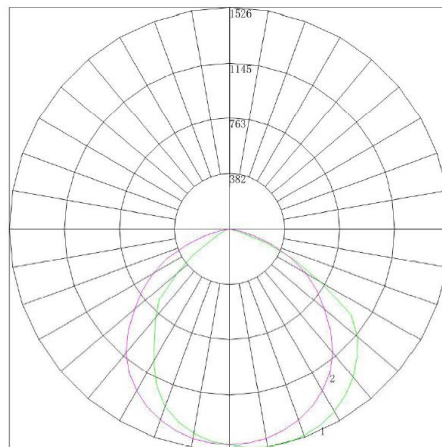



# MORRIS #: 71157A

## DOB Slim-Line Wall Pack

### 120-277V 70W 5000K White

#### Technical Specifications:

##### **Electrical:**

Input Voltage: 120-277V

Current: .17A @ 120V

Frequency: 50/60Hz

Power Factor:  $\geq 0.99$

THD:  $>20\%$

##### **Product Parameters:**

70 Watts

Lumens: 9,222

Efficacy: 132 Lumens Per Watt

50,000+ L70 Life Span

CCT: 5000K (Cool White)

##### **Chromaticity Measurements:**

Beam Angle:  $103^\circ$

CRI:  $>70$

R9:  $-28$

DUV:  $-0.0007$

Chromaticity (x,y):  $x=0.4341$   $y=0.4014$

Chromaticity (u,v):  $u=0.2491$   $v=0.3464$

##### **Component Specifications:**

LED: LumiLED LUXEON 3030

Driver: 100-277V 50/60Hz

Driver Output Volts: 250V/DC

Driver Output Amps: 2.75A

2.5KV Surge Protection

##### **Dimming:**

N/A

##### **Operating Temperature:**

Minimum Starting  $-31^\circ\text{F}$  -  $131^\circ\text{F}$

##### **Construction:**

**Housing:** Die Cast Aluminum Housing

Powder Coated

**IP Rating:** IP65 Wet Location Rated

**Lens Material:** PC

**Mounting:** Wall Mount

##### **Listings:**

DLC PRODUCT ID#: PNE79DB2

Carton Qty: 1

##### **Warranty:**

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).