




71196 - LED TEMPORARY HI-BAY

100W 120V 5000K


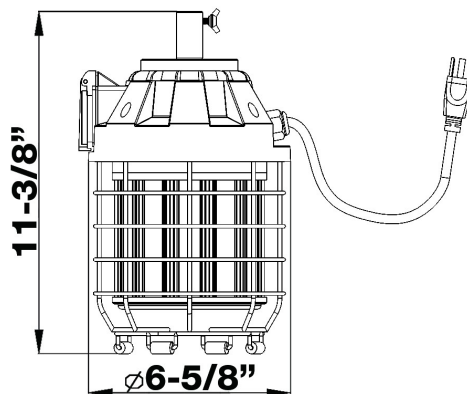


FEATURES:

- Diecast Aluminum Housing & Eyehook
- Heat Resistant Directed Optics
- Polycarbonate Lens
- Excellent Heat Dissipation - Maximum Life
- Expectancy Samsung LEDs
- Male & Female Plugs & Receptacles for wiring in series
- Temporary indoor illumination commonly used on construction jobsites, attics and garages
- Replaces 400W Metal Halide Temporary Site Lighting
- Integral LEDs Included - No Lamp Required
- 120V
- 50,000+ Hr Life Expectancy
- Eye Hook Standard. Optional Hook Mount (Morris #71197) and Magnet Mount (Morris #71198) Sold Separately
- 10' Cord and Plug
- Molded Plug and Integral Molded Receptacle
- IP64 Rated
- Operating Temperature: -4° to 113°F
- cULus Listed

Part#	Wattage	Volts	Lumens	CCT	CRI	Dimming	Light Pattern	Lumens/Watt
71196	100W	120	11,000	5000K	80	N/A	Type V	92

PHOTOMETRY

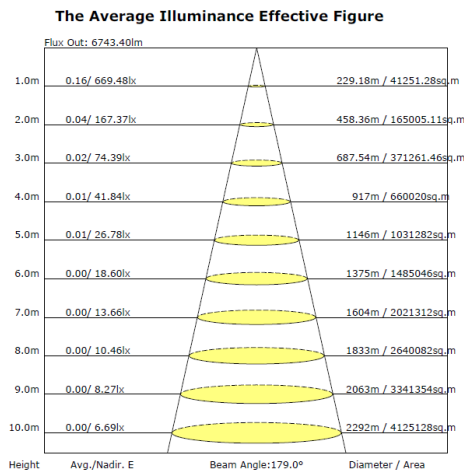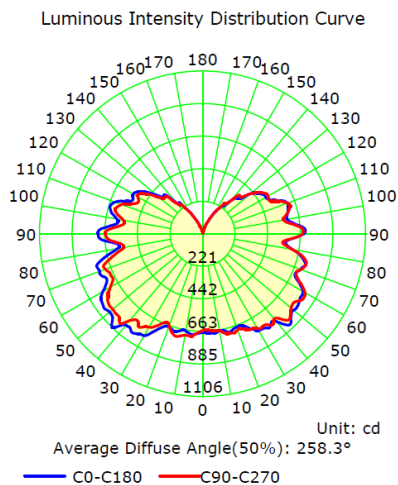



71196 - LED TEMPORARY HI-BAY

100W 120V 5000K

Technical Specifications:

Electrical:

Input Voltage: 120
Current: .80A@120V; .37A@277V
Frequency: 50/60Hz
Power Factor: $\geq$. 95
THD: 20%
@120V

Product Parameters:

Watts: 100W
Lumens: 11,000
Efficacy: 92 lumens per watt 50,000
+ Hour L70 Life Span CCT: 5000K
(Cool White)

Chromaticity Measurements:

Beam Angle: 365° H X 256° V
BUG Rating: B4-U0-G4
CRI: >80
R9: 0

Component

Specifications: LED:

SAMSUNG
120V 50-60HZ
4KV Surge Protection

Dimming: N/A

Operating Temperature:

Minimum Starting -4°F - 113°F

Construction:

Housing: ADC12 Aluminum Alloy
Powder Coated
IP Rating: IP64 suitable for wet locations

Lens Material: Heat Resistant Polycarbonate Lens
UV Resistant Fire Resistant

Mounting: Hook Options:

Standard Hook Included
Heavy Duty Industrial Hook Optional - CAT#: 71197
Magnetic Mount Optional - CAT#: 71198

Listings: cULus

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).