




71333C - LED DUSK TO DAWN BARN LIGHT

120-277V 36W/48W/60W 3K/4K/5K



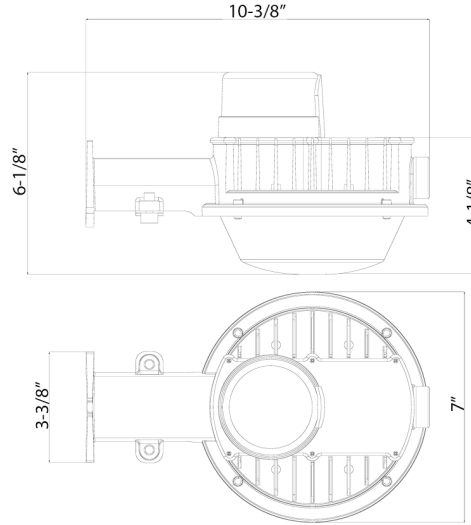


FEATURES:

- Wattage Selectable: 36W/48W/60W
- Color Selectable: 3K/4K/5K
- Die Cast Aluminum Housing
- Optimal Heat Dissipation
- Polycarbonate Lens
- Photocell Included
- Operating Temp: -31°F to 122°F
- Certification: cULus
- Pole Arm Mount (Sold Separately)
- IP65 Rated for Wet Locations
- Environment: Dry and Wet Locations
- DLC PRODUCT ID#: S-Q7JRST
- 5 Year Limited Warranty
- 0-10V Dimming

Part#	Input/Wattage	Volts	Lumens	CCT	CRI	Dimming	Light Pattern	Lumens/Watt	DLC PRODUCT ID #:
71333C	36W/48W/60W	120-277	7,757@60W 5K	3-5K	85	0-10V	134.4°	129lm/w@60W	S-Q7JRST

PHOTOMETRY

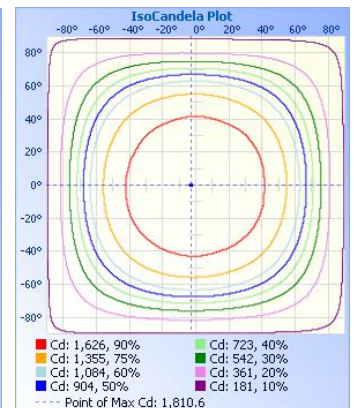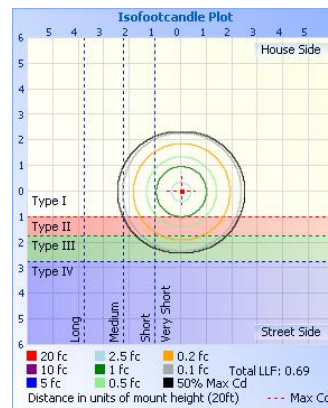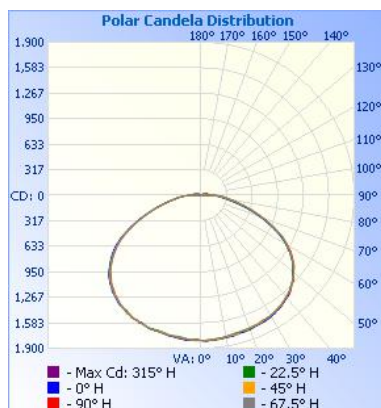



71333C - LED DUSK TO DAWN BARN LIGHT

120-277V 36W/48W/60W 3K/4K/5K

Technical Specifications:

Electrical:

Input Voltage: 120-277V

Current: 0.48A

Frequency: 60Hz

Power Factor: $\geq .9$

THD: 13.3%

Product Parameters:

Input Watts: 36W/48W/60W

Lumens:

7,588@3K/8,537@4K/7,757@5K

Efficacy: 129 lumens per watt

>50,000+ Hour L70 Life Span

CCT: 3000K/4000K/5000K

Operating Temperature: -31°F-122°F

Construction:

Aluminum Housing

IP65 Rated

Lens Material: PC

Lens: UV Resistant

Mounting: Pole Mount -CAT# 71305B Sold Separately

Listings:

cULus

DLC PRODUCT ID#: S-Q7JRST

Leave Dip Switch "3" off for normal operation when utilizing the provided LED twist lock photocontrol

Chromacity Measurements:

Beam Angle: 134.4°

DUV: -0.0011

CRI: 84

R9: 17

(x,y) x=0.4290 y=0.3985

(u,v) u'=0.2479 v'=0.5180

Component Specifications:

LED: SMD 2835

120V

50-60HZ

Surge Protection:

2.5KV Surge Protection

Dimming: 0-10V

Warranty: Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).



Leave Dip Switch "3" off for normal operation when utilizing the provided LED twist lock photocontrol

CCT & Wattage Tuning:

1	2	3	4	5	Function
OFF	OFF	-	-	-	100% (Default Brightness)
ON	OFF	-	-	-	80%
OFF	ON	-	-	-	60%
-	-	ON	-	-	DC Sensor [ON]
-	-	OFF	-	-	DC Sensor [OFF] (Default)
-	-	-	OFF	ON	5000K (Default)
-	-	-	ON	OFF	4000K
-	-	-	OFF	OFF	3000K