




71340B - ARCHITECTURAL FLOOD LIGHT

30W 120-277V 3000K WHITE


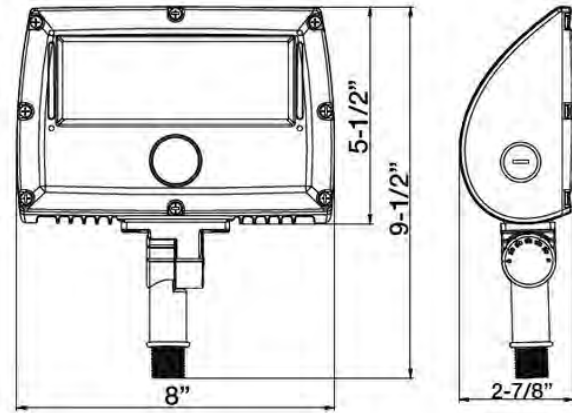


FEATURES:

- Replaces HID, Metal Halide or high pressure sodium floods
- Integral Cooling Fin releases heat efficiently to maintain the life of LED's & LED Driver
- Corrosion resistant Die Cast Aluminum Housing
- Polycarbonate Lens
- Superior Architectural Powder Coat Finish
- Stainless Steel hardware
- 1/2" Adj. Knuckle Mount
- Voltage: 120/208/240/277VAC
- Operating Temperature: -40°F to 104°F
- 50,000+ Hour life expectancy
- IP65 rated
- Listings: cETLus
- DLC PRODUCT ID#: PLEE9CPJDN9U
- 5 Year Warranty

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Beam Angle	Lumens/Watt	DLC PRODUCT ID #:
71340B	White	30W	3,295	5000K	120/208/240/277V	Wide Beam	110lm/w	PLEE9CPJDN9U

PHOTOMETRY

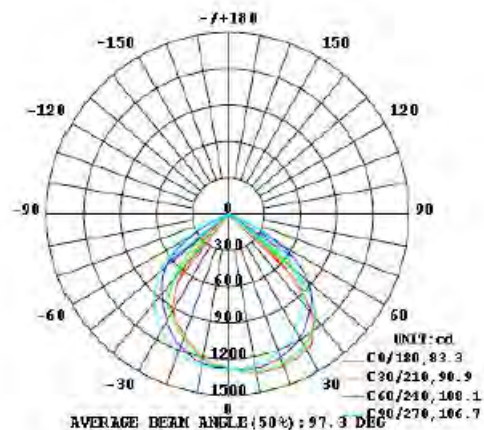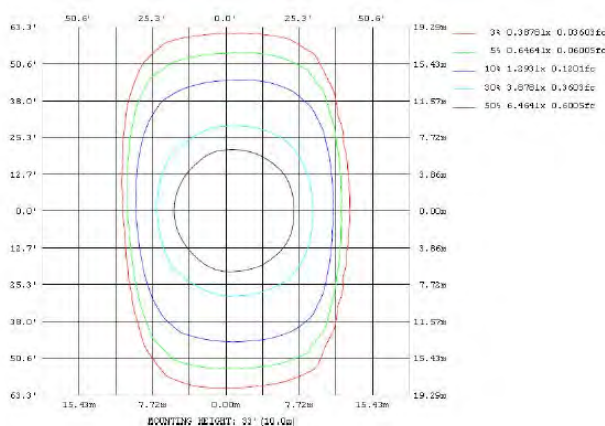



71340B - ARCHITECTURAL FLOOD LIGHT

30W 120-277V 3000K WHITE

Technical Specifications:

Electrical:

Input Voltage: 120/208/240/277V

Current: 0.11A @ 120V

Frequency: 60Hz

Power Factor: ≥ 0.9

THD: 15% @ 120V

Product Parameters:

30 Watts

Efficacy: 125 lumens per watt

50,000+ LED Life Span

CCT: 5000k (Cool White)

Chromaticity Measurements:

Beam Angle: 97.3°

CRI: 70

R9: -16

DUV: 0.0023

Chromaticity (x,y): $x=0.3461$; $y=0.3564$

Chromaticity (u,v): $u=0.2095$; $v=0.4875$

Component Specifications:

LED: SMD2835

Driver: 120/208/240/277V

Frequency: 50-60HZ

Dimming: N/A

Operating Temperature:

Minimum Starting: -40°F to 104°F

Construction:

Housing: Corrosion resistant Die Cast Aluminum Housing

IP Rating: IP65 Wet Location

Lens Material: Polycarbonate

Mounting: 1/2" Adjustable Knuckle, Trunnion Mount (Sold Separately)

Listings:

cETLus,

DLC PRODUCT ID#: PLEE9CPJDN9U

Accessories Available (Sold Separately):

75353B - Trunnion Mount

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).