




71412A - LED CANOPY LIGHT

120-277V 150W 5000K


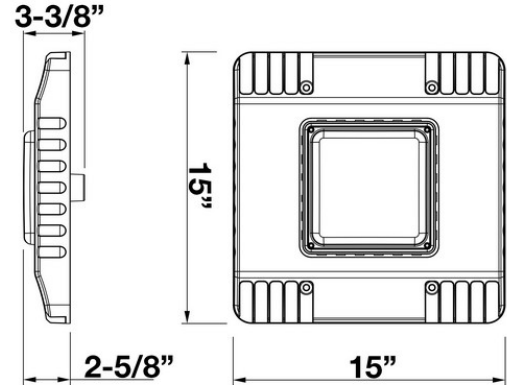


FEATURES:

- Replace HID Metal Halide and High Pressure Sodium canopy fixtures
- SMD2835 LED's
- Operating Temperature: -40°F to 131°F(-40°C to 40°C)
- 50,000+ Hour LED Life Expectancy
- IP65 (NEMA 4X)Dust & Water Tight
- Corrosion Resistant Die Cast Aluminum Housing
- Polycarbonate Lens
- Stainless Steel Hardware
- Superior Architectural White Powder Coat Finish
- Certification: cULus
- Environment: Suitable for Wet Locations

Part#	Input/Wattage	Volts	Lumens	CCT	CRI	Dimming	Light Pattern	Lumens/Watt	DLC Product ID #:
71412A	150	120-277	19,050	5000K	80	N/A	Garage	127	S-C1HN30

PHOTOMETRY

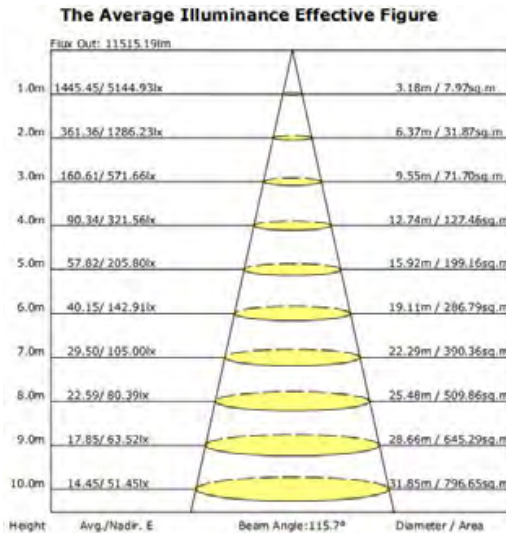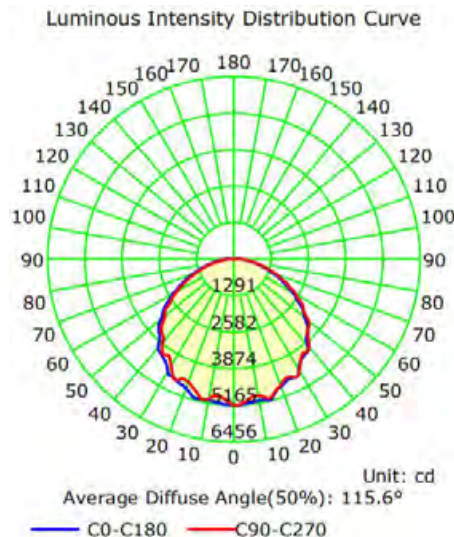



71412A - LED CANOPY LIGHT

120-277V 150W 5000K

Technical Specifications:

Electrical:

Input Voltage: 120V-277V

Current: 1.23A@120V

Frequency: 50/60Hz

Power Factor: $\geq .98$

THD: $\leq 20\%$

Product Parameters:

Input Watts: 150W

Lumens: 19,050

Efficacy: 127 lumens per watt

50,000+ Hour L70 Life Span

CCT: 5000K

Chromaticity Measurements:

Beam Angle: 120°

CRI: 80

R9: 14

Component Specifications:

LED: SMD 2835

120-277V, 50-60Hz

Dimming: N/A

Operating Temperature:

Minimum Starting: -40°F to 122°F

Construction:

Housing: Aluminum Alloy

Powder Coated

IP Rating: IP65 suitable for wet locations

Lens Material: Polycarbonate

Mounting: Ceiling

Listings: cULus, DLC

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).