




71426D - LED BRONZE MEDIUM WALL PACK

120-277V 75W 5000K

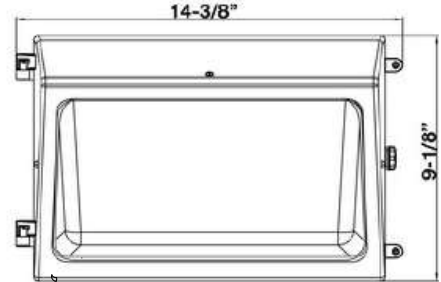

Built-In Photocell Included!


FEATURES:

- Die Cast Aluminum Housing/ Stainless Hardware
- Polyester Bronze Powder Coating
- Aluminum Heat Sink & Customized Fin Design for Optimal Heat Dissipation
- Heat Resistant Optics
- Borosilicate Glass Lens
- *Photocontrol included with on/off switch
- Operation Temperature: -40°F - 104°F
- Emergency Battery Backup (Sold Separately)
- Light Pattern: 110°
- Certifications: ETL/cETL, DLC
- Wet Location Rated
- 5 Year Warranty

*The ON/OFF photocell is pre-installed in the fixture and the default switch setting is ON. The photocell must be turned OFF for the fixture to operate when there is ambient or bright light.

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Dimming	Replaces Metal Halide	DLC PRODUCT ID#:
71426D	Bronze	75W	9394	5000K	120-277V	0-10V	250W	S-OLWU8G

PHOTOMETRY:

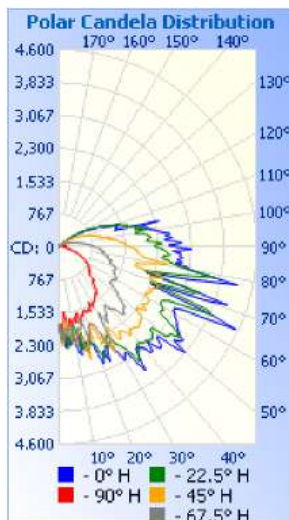



71426D - LED BRONZE MEDIUM WALL PACK

120-277V 75W 5000K

TECHNICAL SPECIFICATIONS:

Electrical:

Input Voltage:

120-277V

Power Factor: ≥ 0.9

THD: $< 20\%$

LED:

Long Life High Efficiency

50,000+ LED Life Span

Color Temperature:

5000K (Cool White)

CRI: > 70

Driver:

120-277V

0-10 V Dimming (10%-100%)

2KV Surge Protection Standard

10KV Optional

Operating Temperature:

-40°F - 104°F

Construction:

Housing:

Die Cast Aluminum Heat Sink, Powder Coated

IP Rating: Rating of IP65 suitable for wet locations

Lens Material:

Prismatic Glass Lens

LED Board:

Aluminum High Conductive, Waterproof, Aging Re-sistance, Salt Mist Resistance

Mounting:

4 x 1/2" conduit openings with 3 plugs. (1) each side, (1) back, (1) top

Listings:

ETL listed

DLC PRODUCT ID#: S-OLWU8G

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).