



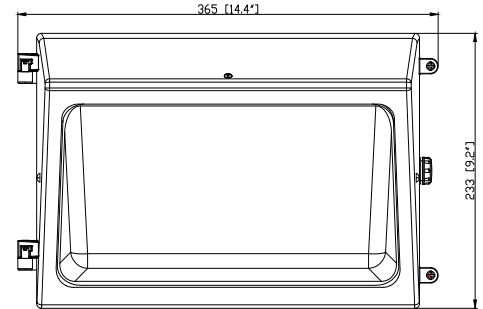

# 71429D - LED WHITE MEDIUM WALL PACK

120-277V 75W 5000K

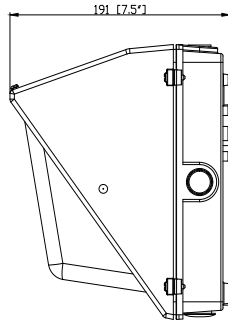

**Includes Built-In Photocell!**




**FEATURES:**

- Die Cast Aluminum Housing/ Stainless Hardware
- Polyester White Powder Coating
- Aluminum Heat Sink & Customized Fin Design for Optimal Heat Dissipation
- Heat Resistant Optics
- Borosilicate Glass Lens
- 0-10V Dimmable
- \*Photocontrol included with on/off switch
- Operation Temperature: -40°F - 104°F
- Emergency Battery Backup (Sold Separately)
- Light Pattern: 99°
- Certifications: ETL/cETL, DLC
- Wet Location Rated
- DLC PRODUCT ID#: S-OLWU8G
- 5 Year Warranty

\*The ON/OFF photocell is pre-installed in the fixture and the default switch setting is ON. The photocell must be turned OFF for the fixture to operate when there is ambient or bright light.

| Part#  | Housing Color | Wattage | Lumens | CCT   | Voltage  | Dimming | Replaces Metal Halide | DLC PRODUCT ID#: |
|--------|---------------|---------|--------|-------|----------|---------|-----------------------|------------------|
| 71426D | Bronze        | 75W     | 9394   | 5000K | 120-277V | 0-10V   | 250W                  | S-OLWU8G         |

**PHOTOMETRY:**

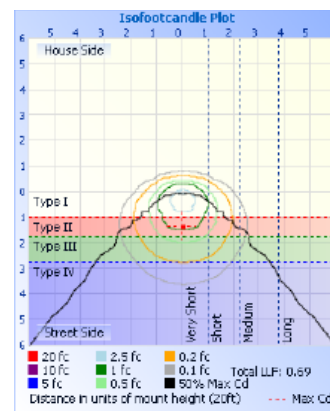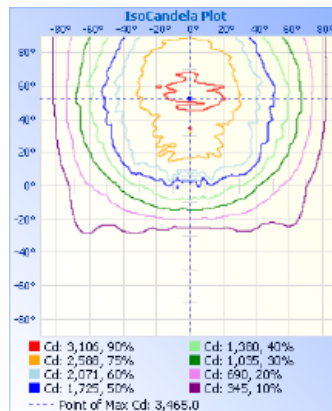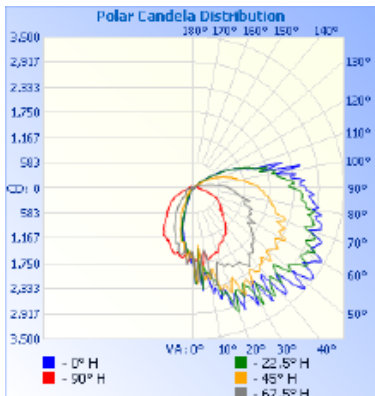



# 71429D - LED WHITE MEDIUM WALL PACK

120-277V 75W 5000K

## TECHNICAL SPECIFICATIONS:

### Electrical:

Input Voltage: 120V-277V

Current: see chart pg 1

Frequency: 50/60Hz

Power Factor:  $\geq 0.90$

THD:  $< 20\%$  @120V

### Product Parameters:

Efficacy: 123 lumens per watt

50,000+ Hour L70 Life Span

CCT: 5000K (Cool White)

### Chromacity Measurements:

Beam Angle: 99°

BUG Rating: B1-U5-G5

CRI: 70

R9: -34

### Component Specifications:

LED

120V-277V

**Dimming:** 0-10V

**Operating Temperature:** -40°F - 104°F

### Construction:

Housing: Die Cast Aluminum Alloy Powder Coated  
Finish

Lens Material: Prismatic Borosilicate Glass Lens Lens:  
UV Resistant Fire Resistant

Ingress Protection: WET location Rated

**Mounting:** Wall Mount

### Listings:

cETLus

DLC PRODUCT ID#: S-OLWU8G

---

### Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).