



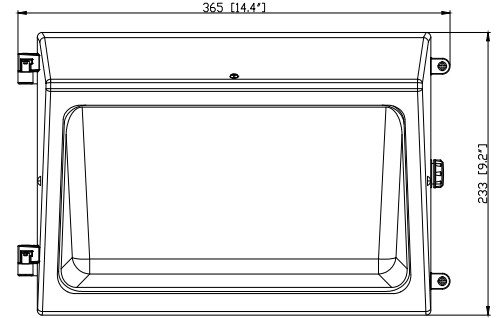

# 71431D - LED BRONZE MEDIUM WALL PACK

120-277V 90W 5000K

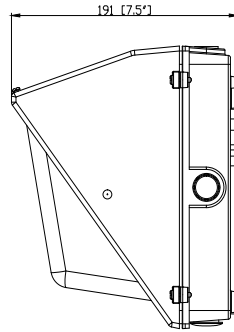

**Built-In Photocell Included!**




**FEATURES:**

- Die Cast Aluminum Housing/ Stainless Hardware
- Polyester White Powder Coating
- Aluminum Heat Sink & Customized Fin Design for Optimal Heat Dissipation
- Heat Resistant Optics
- Borosilicate Glass Lens
- 0-10V Dimmable
- \*Photocontrol included with on/off switch
- Operation Temperature: -40°F - 104°F
- Emergency Battery Backup (Sold Separately)
- Light Pattern: 111°
- Certifications: ETL/cETL
- DLC PRODUCT ID#: S-JQGTUD
- Wet Location Rated
- 5 Year Warranty

\*The ON/OFF photocell is pre-installed in the fixture and the default switch setting is ON. The photocell must be turned OFF for the fixture to operate when there is ambient or bright light.

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Dimming	Replaces Metal Halide	DLC PRODUCT ID#:
71431D	Bronze	90W	11345	5000K	120-277V	0-10V	300W	S-JQGTUD

**PHOTOMETRY:**

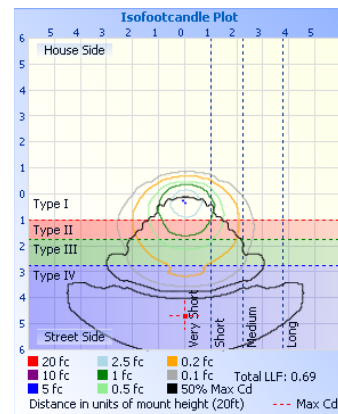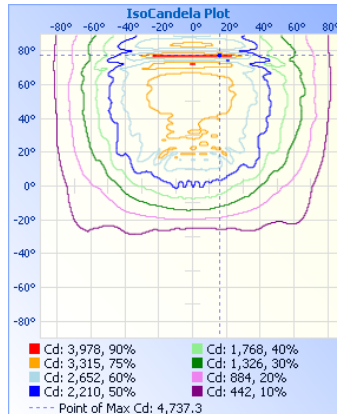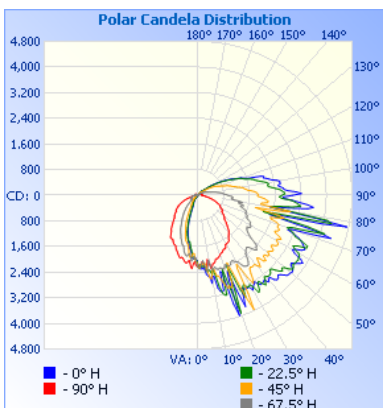



# 71431D - LED BRONZE MEDIUM WALL PACK

120-277V 90W 5000K

## TECHNICAL SPECIFICATIONS:

### Electrical:

Input Voltage: 120V-277V

Current: see chart pg 1

Frequency: 50/60Hz

Power Factor:  $\geq .90$

THD:  $<20\%$  @120V

### Product Parameters:

Efficacy: 126 lumens per watt

50,000+ Hour L70 Life Span

CCT: 5000K (Cool White)

### Chromaticity Measurements:

Beam Angle:  $111^\circ$

BUG Rating: B2-U5-G5

CRI: 73

R9: -31

### Component Specifications:

LED

120V-277V

**Dimming:** 0-10V

**Operating Temperature:**  $-40^\circ\text{F}$  -  $104^\circ\text{F}$

### Construction:

Housing: Die Cast Aluminum Alloy Powder Coated

Finish

Lens Material: Prismatic Borosilicate Glass Lens Lens:

UV Resistant, Fire Resistant

Ingress Protection: WET location Rated

**Mounting:** Wall Mount

### Listings:

cETLus

DLC PRODUCT ID#: S-JQGTUD

---

### Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).