



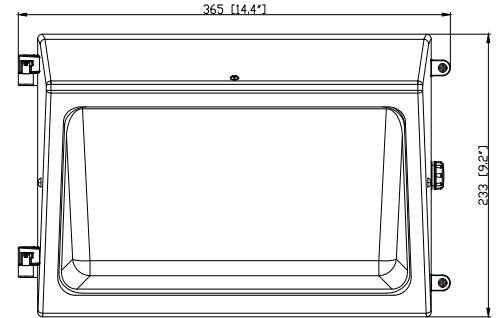

71449D - LED BRONZE MEDIUM WALL PACK

277-480V 75W 5000K



Built-In Photocell Included!




FEATURES:

- Die Cast Aluminum Housing/ Stainless Hardware
- Polyester White Powder Coating
- Aluminum Heat Sink & Customized Fin Design for Optimal Heat Dissipation
- Heat Resistant Optics
- Borosilicate Glass Lens
- 0-10V Dimmable
- *Photocontrol included with on/off switch
- Operation Temperature: -40°F - 104°F
- Emergency Battery Backup (Sold Separately)
- Light Pattern: 112°
- Certifications: ETL/cETL
- DLC PRODUCT ID#: S-IV8YEK
- Wet Location Rated
- 5 Year Warranty

*The ON/OFF photocell is pre-installed in the fixture and the default switch setting is ON. The photocell must be turned OFF for the fixture to operate when there is ambient or bright light.

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Dimming	Replaces Metal Halide	DLC PRODUCT ID#:
71449D	Bronze	75W	9190	5000K	277-480V	0-10V	250W	S-IV8YEK

PHOTOMETRY:

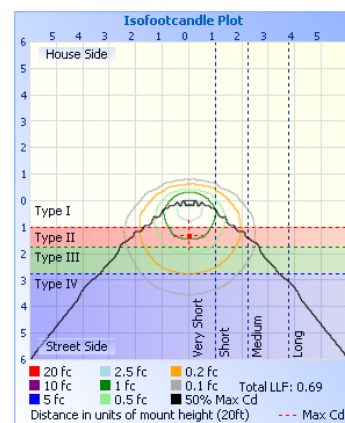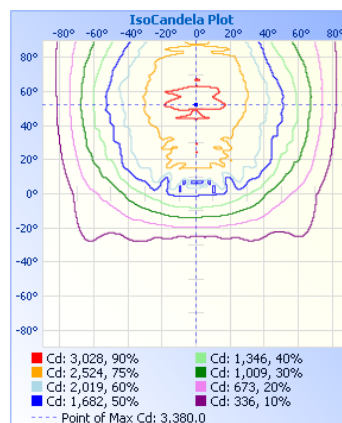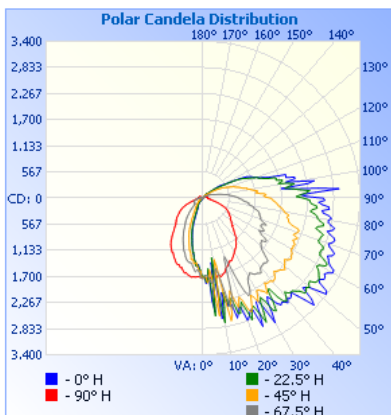



71449D - LED BRONZE MEDIUM WALL PACK

277-480V 75W 5000K

TECHNICAL SPECIFICATIONS:

Electrical:

Input Voltage: 277-480V

Current: see chart pg 1

Frequency: 50/60Hz

Power Factor: ≥ 0.88

THD: $< 20\%$ @480V

Product Parameters:

Efficacy: 130 lumens per watt

50,000+ Hour L70 Life Span

CCT: 5000K (Cool White)

Chromaticity Measurements:

Beam Angle: 112°

BUG Rating: B1-U4-G5

CRI: 73

R9: -34

Component Specifications:

LED

277-480V

Dimming: 0-10V

Operating Temperature: -40°F - 104°F

Construction:

Housing: Die Cast Aluminum Alloy Powder Coated
Finish

Lens Material: Prismatic Borosilicate Glass Lens Lens:
UV Resistant, Fire Resistant

Ingress Protection: WET location Rated

Mounting: Wall Mount

Listings:

cETLus

DLC PRODUCT ID#: S-IV8YEK

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).