



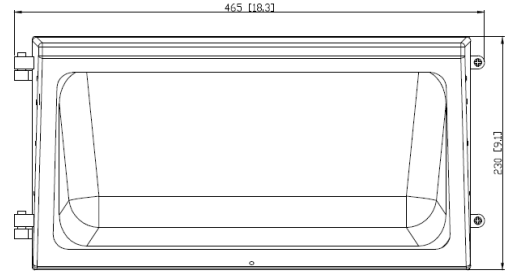

71450D - LED BRONZE LARGE WALL PACK

120W 277-480V 5000K



Built-In Photocell Included!




FEATURES:

- Die Cast Aluminum Housing/ Stainless Hardware
- Polyester White Powder Coating
- Aluminum Heat Sink & Customized Fin Design for Optimal Heat Dissipation
- Heat Resistant Optics
- Borosilicate Glass Lens
- 0-10V Dimmable
- *Photocontrol included with on/off switch
- Operation Temperature: -40°F - 104°F
- Emergency Battery Backup (Sold Separately)
- Light Pattern: 115°
- Certifications: ETL/cETL
- DLC PRODUCT ID#: S-MJDZ96
- Wet Location Rated
- 5 Year Warranty

*The ON/OFF photocell is pre-installed in the fixture and the default switch setting is ON. The photocell must be turned OFF for the fixture to operate when there is ambient or bright light.

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Dimming	Replaces Metal Halide	DLC PRODUCT ID#:
71450D	Bronze	120W	15251	5000K	277-480V	0-10V	400W	S-MJDZ96

PHOTOMETRY:

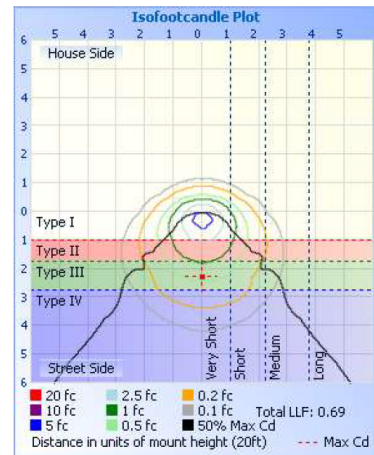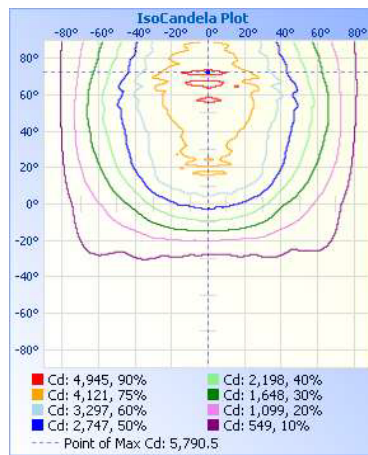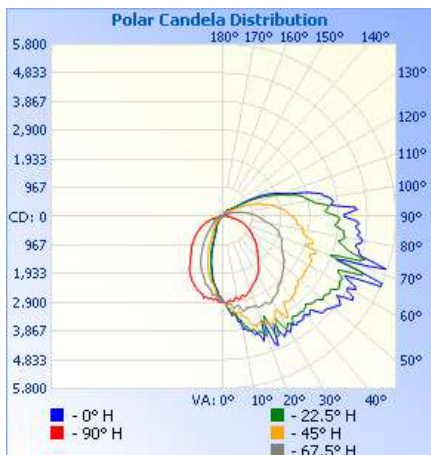



71450D - LED BRONZE LARGE WALL PACK

120W 277-480V 5000K

TECHNICAL SPECIFICATIONS:

Electrical:

Input Voltage: 277-480V

Current: see chart pg 1

Frequency: 50/60Hz

Power Factor: $\geq .90$

THD: $< 20\%$ @277V

Product Parameters:

Efficacy: 128 lumens per watt

50,000+ Hour L70 Life Span

CCT: 5000K (Cool White)

Chromacity Measurements:

Beam Angle: 115°

BUG Rating: B2-U5-G5

CRI: 74

R9: -33

Component Specifications:

LED

277V-480V

Dimming: 0-10V

Operating Temperature: -40°F - 104°F

Construction:

Housing: Die Cast Aluminum Alloy Powder

Coated Finish

Lens Material: Prismatic Borosilicate Glass Lens

Lens: UV Resistant, Fire Resistant

Ingress Protection: WET location Rated

Mounting: Wall Mount

Listings:

cETLus

DLC PRODUCT ID#: S-MJDZ96

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).