



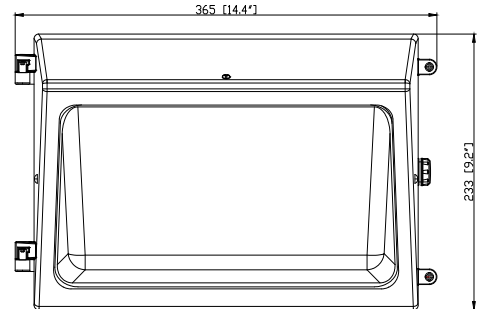

71472D - LED BRONZE MEDIUM WALL PACK

120-277V 120W 5000K



Built-In Photocell Included!




FEATURES:

- Die Cast Aluminum Housing/ Stainless Hardware
- Polyester White Powder Coating
- Aluminum Heat Sink & Customized Fin Design for Optimal Heat Dissipation
- Heat Resistant Optics
- Borosilicate Glass Lens
- 0-10V Dimmable
- *Photocontrol included with on/off switch
- Operation Temperature: -40°F - 104°F
- Emergency Battery Backup (Sold Separately)
- Light Pattern: 97°
- Certifications: ETL/cETL, DLC
- Wet Location Rated
- DLC PRODUCT ID#: S-E57LZT
- 5 Year Warranty

*The ON/OFF photocell is pre-installed in the fixture and the default switch setting is ON. The photocell must be turned OFF for the fixture to operate when there is ambient or bright light.

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Dimming	Replaces Metal Halide	DLC PRODUCT ID#:
71472D	Bronze	120W	14764	5000K	120-277V	0-10V	400W	S-E57LZT

PHOTOMETRY:

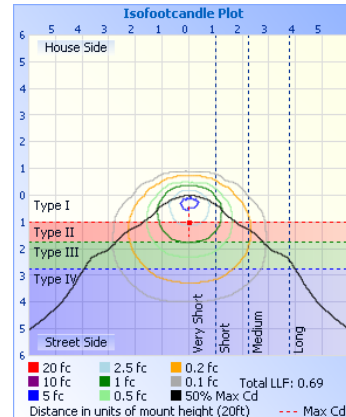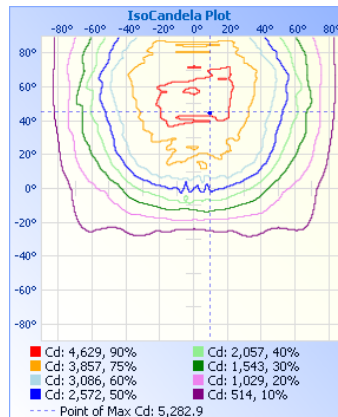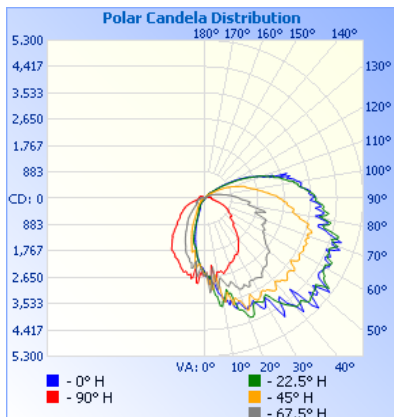



71472D - LED BRONZE MEDIUM WALL PACK

120-277V 120W 5000K

TECHNICAL SPECIFICATIONS:

Electrical:

Input Voltage: 120V-277V

Current: see chart pg 1

Frequency: 50/60Hz

Power Factor: ≥ 0.90

THD: $< 20\%$ @120V

Product Parameters:

Efficacy: 119 lumens per watt

50,000+ Hour L70 Life Span

CCT: 5000K (Cool White)

Chromacity Measurements:

Beam Angle: 97°

BUG Rating: B2-U5-G5

CRI: 76

R9: -26

Component Specifications:

LED

120V-277V

Dimming: 0-10V

Operating Temperature: -40°F - 104°F

Construction:

Housing: Die Cast Aluminum Alloy Powder Coated Finish

Lens Material: Prismatic Borosilicate Glass Lens

Lens: UV Resistant, Fire Resistant

Ingress Protection: WET location Rated

Mounting: Wall Mount

Listings:

cETLus

DLC PRODUCT ID#: S-E57LZT

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).