



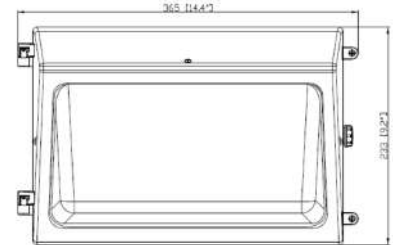

71476D - BRONZE MEDIUM WALL PACK

CCT & WATTAGE SELECTABLE

60W/75W/90W 120-277V 3K-5K



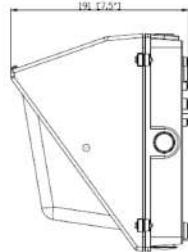


FEATURES:

- Use in general lighting applications: Parking Lots & Building Security
- Wattage Selectable: 60/75/90W
- Seoul LEDs
- Die Cast Aluminum Housing
- Polyester Powder Coat Finish in Bronze
- 4 Threaded K/Os -(1)Top, (1)Back, (2)Sides
- Photocontrol included with on/off switch
- Color Selectable: 3000K, 4000K, 5000K
- 4KV surge protector inside of power supply
- 5 Year Limited Warranty
- IP65 rated
- Certification: ETL/cETL
- Environment: Suitable for Wet Locations

Part#	CCT	Lumens	Voltage	Wattage	Beam Angle	Dimming	Lumens/Watt
71476D	3000K	8,120 @ 60W	120-277V	60W	95°	0-10/PWM	123lm/w
	4000K	10,162 @ 75W		75W			135lm/w
	5000K	11,526 @ 90W		90W			128lm/w

PHOTOMETRY

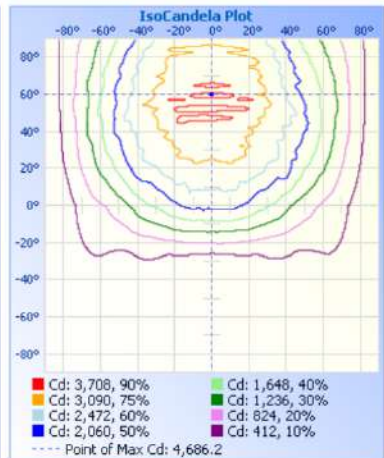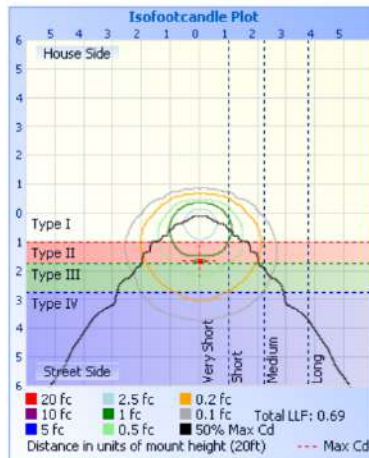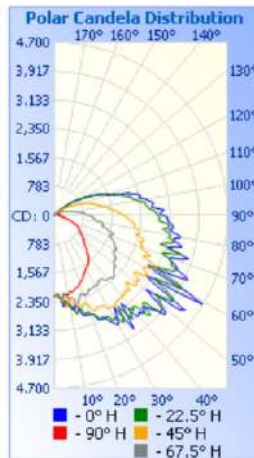



71476D - BRONZE MEDIUM WALL PACK

CCT & WATTAGE SELECTABLE

60W/75W/90W 120-277V 3K-5K

Technical Specifications:

Electrical:

Input Voltage: 120-277V

Current: .75A@120V

Frequency: 50/60Hz

Power Factor: $\geq .9$

THD: $\leq 20\%$

Product Parameters:

Input Watts: 60W, 75W, 90W

Lumens: 10,650-12,155

Efficacy: 129-145 lumens per watt

50,000+ Hour L70 Life Span

CCT: 3000K/4000K/5000K

Chromaticity Measurements:

Beam Angle: 95°

BUG Rating: B2-U5-G5

CRI: >72

R9: -30

Component Specifications:

LED: Seoul 2835

120-277V, 50-60Hz

Driver Output Volts: 70-130V

Driver Output Amps: 1000mA

4KV Surge Protection

Dimming: 0-10V

Operating Temperature:

Minimum Starting: -40°F to 104°F

Construction:

Housing: Die Cast Aluminum

Powder Coated Bronze Finish

IP Rating: IP65 suitable for wet locations

Lens Material: Heat Resistant Polycarbonate

Lens UV Resistant, Fire Resistant

Mounting: Hinged Spider Plate

Listings: ETL, DLC Product ID: S-S0DL4N

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).

LUMEN BREAKDOWN:

	3000K	4000K	5000K
60W	8,120	8,622	8,565
75W	9,560	10,162	10,074
90W	11,149	12,155	11,526