



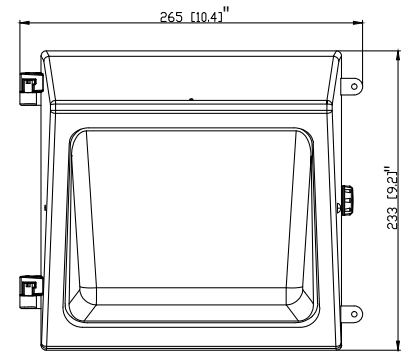

# 71637D - LED BRONZE SMALL WALL PACK

120-277V 45W 5000K

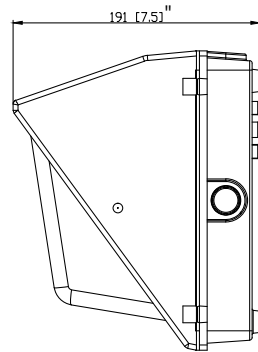

**Includes Built-In Photocell!**




## FEATURES:

- Die Cast Aluminum Housing/ Stainless Hardware
- Polyester White Powder Coating
- Aluminum Heat Sink & Customized Fin Design for Optimal Heat Dissipation
- Heat Resistant Optics
- Borosilicate Glass Lens
- 0-10V Dimmable
- \*Photocontrol included with on/off switch
- Operation Temperature: -40°F - 104°F
- Emergency Battery Backup (Sold Separately)
- Light Pattern: 104°
- Certifications: ETL/cETL
- DLC PRODUCT ID#: S-OZBN4L
- Wet Location Rated
- 5 Year Warranty

\*The ON/OFF photocell is pre-installed in the fixture and the default switch setting is ON. The photocell must be turned OFF for the fixture to operate when there is ambient or bright light.

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Dimming	Replaces Metal Halide	DLC PRODUCT ID#:
71637D	Bronze	45W	5780	5000K	120-277V	0-10V	150W	S-OZBN4L

## PHOTOMETRY:

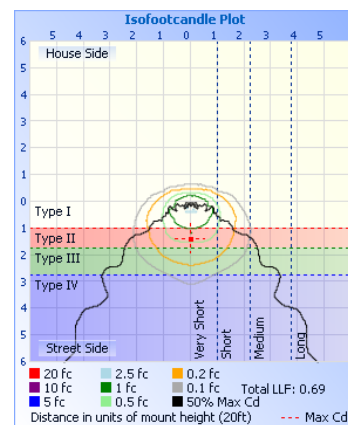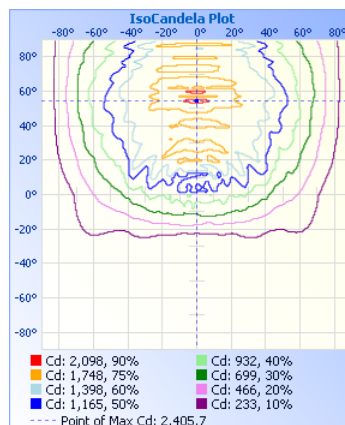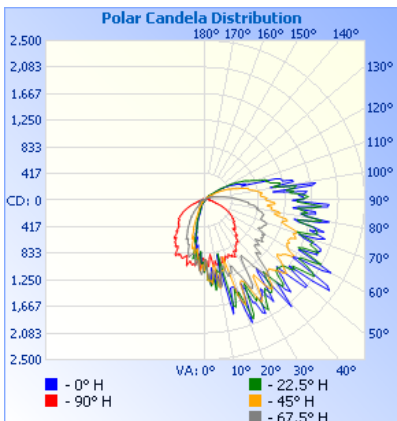



# 71637D - LED BRONZE SMALL WALL PACK

120-277V 45W 5000K

## TECHNICAL SPECIFICATIONS:

### Electrical:

Input Voltage: 120V-277V

Current: see chart pg 1

Frequency: 50/60Hz Power

Factor:  $\geq 0.90$

THD:  $< 20\%$  @120V

**Operating Temperature:** -40°F - 104°F

### Construction:

Housing: Die Cast Aluminum Alloy Powder Coated Finish

Lens Material: Prismatic Borosilicate Glass Lens

Lens UV Resistant Fire Resistant

### Product Parameters:

Efficacy: 130 lumens per watt

50,000+ Hour L70 Life Span

CCT: 5000K (Cool White)

Ingress Protection: WET location Rated

**Mounting:** Wall Mount

### Chromacity Measurements:

Beam Angle: 104°

BUG Rating: B1-U4-G4

CRI: 74

R9: -31

### Listings:

cETLus

DLC PRODUCT ID#: S-OZBN4L

### Component Specifications:

LED

120V-277V

### Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).

**Dimming:** 0-10V